



ADAN

design: Roberto Mantovani


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)

Power
Pouissance
Potencia
4.5W

FLEXALIGHTING
NORTH AMERICA

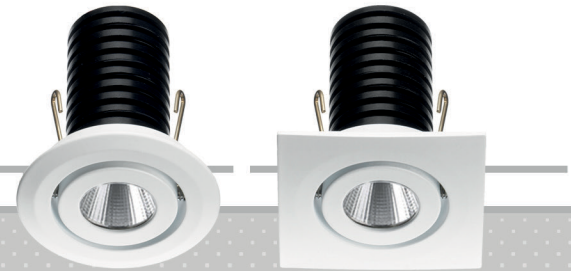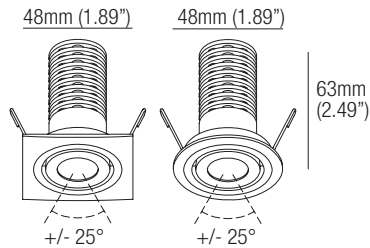

Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto


PJ|X|X|X|XX|E

PJ	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	Round Rond Redondo	1	White Blanc Blanco	1	25°	27	2700K	
	2	Square Carré Cuadrado	2	Aluminum Aluminium Aluminio	2	45°	30	3000K	
			3	Chrome Cromo	3	20+55° (Elliptical)	35	3500K	
			4	Gold Or Oro			40	4000K	
			5	Black Noir Negro			DW	Dim Warm	
			6	Bronze Bronce			CU	Custom Personnalisée Personalizado	
			C	Custom Personnalisée Personalizado					

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring
Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6

Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria


T-Bar Installation

R01040

Mounting Plate
with 40mm Hole

MP-R040

Mounting Plate
with 40mm Hole

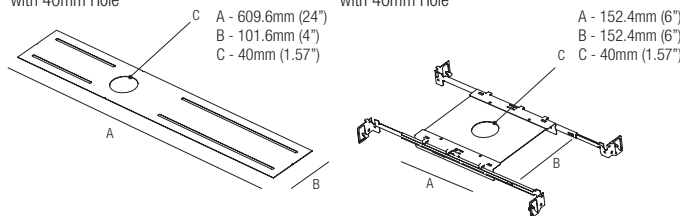


IC Housings

IC064R01040

Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040


Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios


CS1005

Recessing box
Boîtier d'encastrement
Caja de empotrar




DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




BABA Q6

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Pouissance
Potencia
4.5W

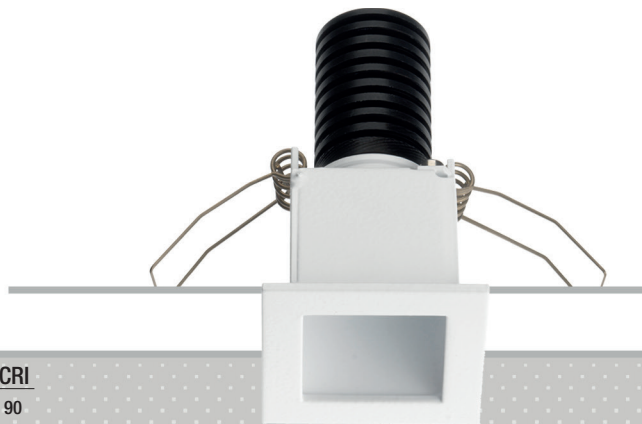

Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

BW2 | X | X | XX | E


BW2	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
					35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 3

L001

Low luminance louvre


Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria

MP-Q040


Mounting Plate
with 40mm Hole



T-Bar Installation

Q01040

Mounting Plate
with 40mm Hole




IC Housings

IC064Q01040

Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064Q01040


Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios


DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



BABA R6

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)


Power
Puissance
Potencia
4.5W



FLEXALIGHTING

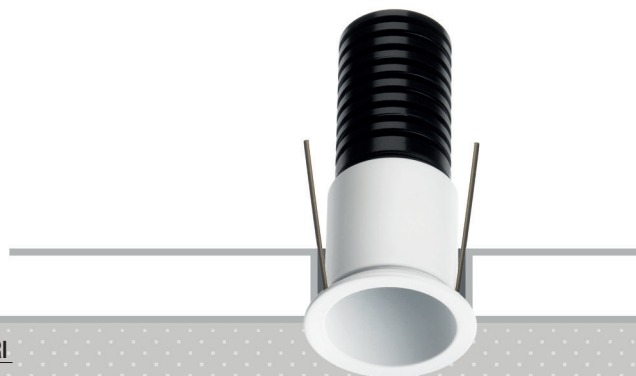NORTH AMERICA


Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

BW1 | X | X | XX | E


BW1	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
	C	Custom Personnalisée Personalizado			35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 3

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria


MP-R030

Mounting Plate
with 30mm Hole



RO1030


Mounting Plate
with 30mm Hole

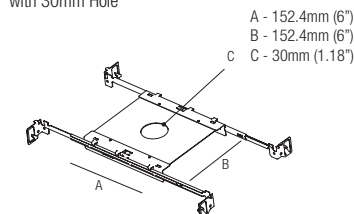

IC Housings

IC064R01030
Recessed Box for
Insulated Ceiling
with 30mm Hole


AT064R01030
Air Tight Recessed
Box for Insulated
Ceiling with
30mm Hole



Optionals - Accessoires - Accesorios


CS1006

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



BABA R10



design: J. Allen

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)


Power
Pouissance
Potencia
10W

FLEXALIGHTING

NORTH AMERICA

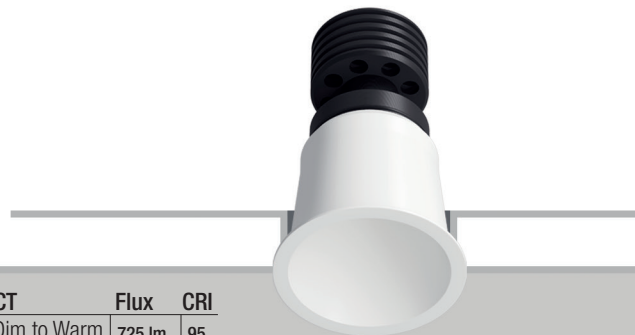

Photometric diagrams

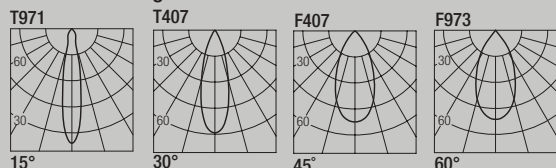

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

BW4 X XX 9 X


BW4	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		1	15°
		5 Black Noir Negro		30 3000K		2	30°
		C Custom Personnalisée Personalizado		35 3500K		3	45°
				40 4000K		4	60°
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options


L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R051
Mounting Plate
with 51mm Hole




T-Bar Installation
R01051
Mounting Plate
with 51mm Hole



IC Housings

IC064R01051
Recessed Box for
Insulated Ceiling
with 51mm Hole


AT064R01051
Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W






BLACK 6


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 8.7V)

Power
 Puissance
 Potencia
4.5W



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

BK2 | X | XX | X | E


BK2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S 25°
		5 Black Noir Negro		30 3000K		M 45°
		C Custom Personnalisée Personalizado		35 3500K		
				40 4000K		
				DW Dim Warm		
				CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie




For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 3

MP-R045


Mounting Plate
 with 45mm Hole



T-Bar Installation

R01045

Mounting Plate
 with 45mm Hole

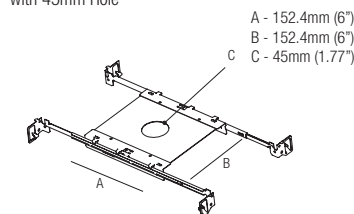


IC Housings

IC064R01045

Recessed Box for
 Insulated Ceiling
 with 45mm Hole

AT064R01045


Air Tight Recessed
 Box for Insulated
 Ceiling with
 45mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W






BLACK 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_I 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

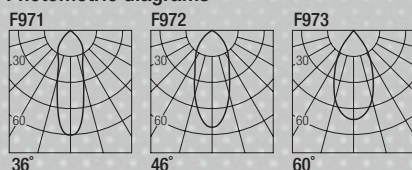

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
		95

Code Construction

Construction du code produit
Construcción del código de producto

BK3 | X | XX | 9 | X


BK3	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

MP-R055


Mounting Plate
with 55mm Hole



T-Bar Installation

R01055

Mounting Plate
with 55mm Hole




IC Housings

IC064R01055

Recessed Box for
Insulated Ceiling
with 55mm Hole

AT064R01055


Air Tight Recessed
Box for Insulated
Ceiling with
55mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



HAP 110



design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA

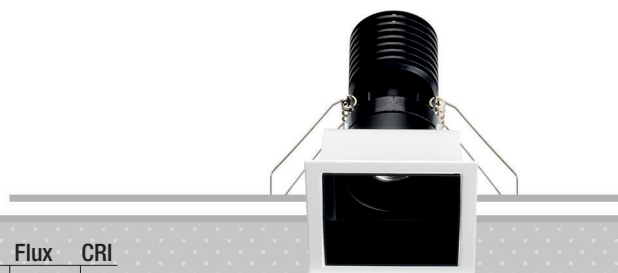

Photometric diagrams

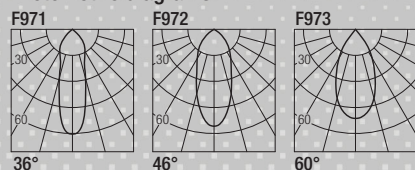

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

HP11|X|XX|9|X|


HP11	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	36°
		5 Black Noir Negro		30 3000K		M	46°
		C Custom Personnalisée Personalizado		35 3500K		W	60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia

LOH1B


Black
 Noir
 Negro




Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W




MP-Q058
 Mounting Plate
 with 58mm Hole



T-Bar Installation


Q01058
 Mounting Plate
 with 58mm Hole



IC Housings

IC086Q02058
 Recessed Box for
 Insulated Ceiling
 with 58mm Hole

AT086Q02058
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 58mm Hole





HAP 120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_r 2 x 18V)

Power
Pouissance
Potencia
2 x 10W

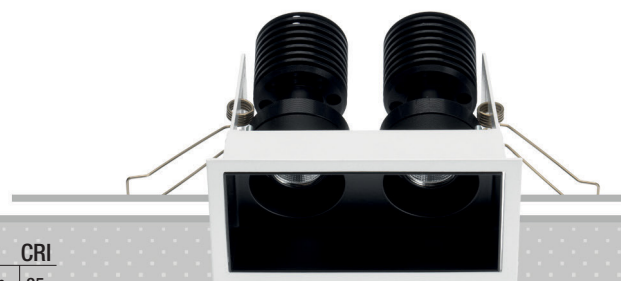

Photometric diagrams

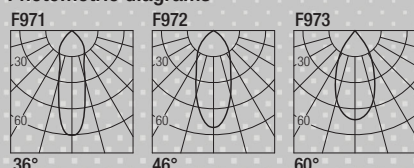

CCT	Flux _(x2)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

HP12 | X | XX | 9 | X |


HP12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White 500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

2 x L0H1B


Black
Noir
Negro



Optionals - Accessoires - Accesorios


DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



MP-X108


Mounting Plate
with 108x57mm Hole



T-Bar Installation

X02108

Mounting Plate
with 108x57mm Hole




IC Housings

IC086X02108

Recessed Box for
Insulated Ceiling
with 108x57mm Hole

AT086X02108

Air Tight Recessed
Box for Insulated
Ceiling with
108x57mm Hole




HAP 130


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 3 x 18V)

Power
Puissance
Potencia
3 x 10W



Photometric diagrams

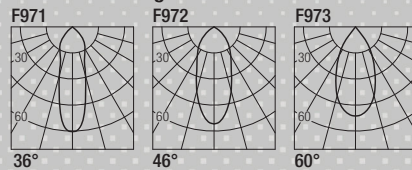

CCT	Flux _(cd)	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			



Code Construction

Construction du code produit
Construcción del código de producto

HP13|X|XX|9|X|


HP13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	36°
		5 Black Noir Negro		30 3000K		M	46°
		C Custom Personnalisée Personalizado		35 3500K		W	60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia


3 x LOH1B

Black
Noir
Negro



MP-X158


Mounting Plate
with 158x57mm Hole



T-Bar Installation

X03158

Mounting Plate
with 158x57mm Hole

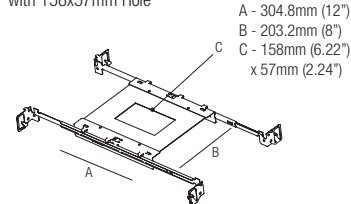


IC Housings

IC127X03158

Recessed Box for
Insulated Ceiling
with 158x57mm Hole

AT127X03158


Air Tight Recessed
Box for Insulated
Ceiling with
158x57mm Hole



Optionals - Accessoires - Accesorios


3 x DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



HAP 140

design: Lapo Grassellini




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 4 x 18V)

Power
Pouissance
Potencia
4 x 10W



Photometric diagrams

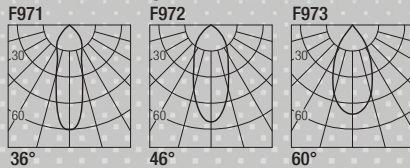

CCT	Flux _(x4)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

HP14 | X | XX | 9 | X |


HP14	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	36°
		5 Black Noir Negro		30 3000K		M	46°
		C Custom Personnalisée Personalizado		35 3500K		W	60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x4 Min. 1 Max. 1
	CCPR040-A x2 Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x4 Min. 1 Max. 1
	CCPR040-A x2 Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

4 x L0H1B


Black
Noir
Negro



Optionals - Accessoires - Accesorios


2 x DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



MP-X208


Mounting Plate
with 208x57mm Hole



T-Bar Installation

X03208

Mounting Plate
with 208x57mm Hole

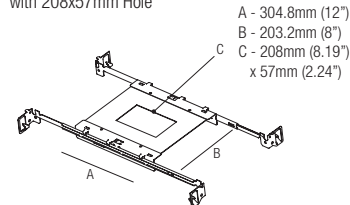


IC Housings

IC127X03208

Recessed Box for
Insulated Ceiling
with 208x57mm Hole


AT127X03208

Air Tight Recessed
Box for Insulated
Ceiling with
208x57mm Hole




KOL

design: Roberto Mantovani




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 8.7V)

Power
 Pouissance
 Potencia
4.5W

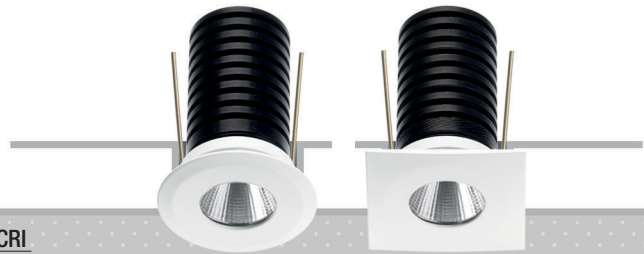

Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

PW|X|X|X|XX|E|


PW	X	Shape Forme Forma	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	Round Rond Redondo	1	White Blanc Blanco	5	25°	27	2700K	
	2	Square Carré Cuadrado	2	Aluminum Aluminium Aluminio	6	45°	30	3000K	
			3	Chrome Cromo	9		35	3500K	
			4	Gold Or Oro			40	4000K	
					C		DW	Dim Warm	
							CU	Custom Personnalisée Personalizado	

Optionals - Accessoires - Accesorios


Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia

L001


CS1002
Recessing box
 Boîtier d'encastrement
 Caja de empotrar




CS1006
Recessing box
 Boîtier d'encastrement
 Caja de empotrar



DCVI.B.1
 24VDC Constant
 Voltage to Constant
 Current Converter
 0-10V / Phase / Dim to
 Warm Compatible, 13W




MP-R030
 Mounting Plate
 with 30mm Hole



T-Bar Installation


R01030
 Mounting Plate
 with 30mm Hole

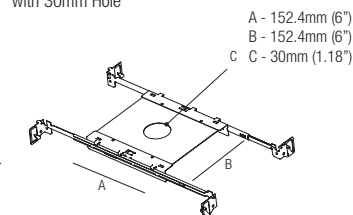

IC Housings

IC064R01030
 Recessed Box for
 Insulated Ceiling
 with 30mm Hole

AT064R01030
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 30mm Hole




Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory


Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 3

KORINE R10


design: J. Allen

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

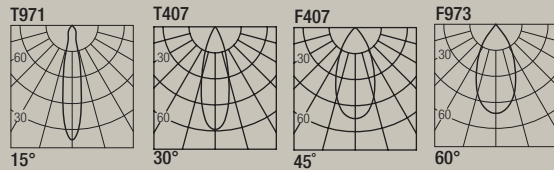

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

KOR | X | XX | 9 | X |


KOR	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		1	15°
		5 Black Noir Negro		30 3000K		2	30°
		C Custom Personnalisée Personalizado		35 3500K		3	45°
				40 4000K		4	60°
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

L001

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria


Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




MP-R051
Mounting Plate
with 51mm Hole



T-Bar Installation


R01051
Mounting Plate
with 51mm Hole

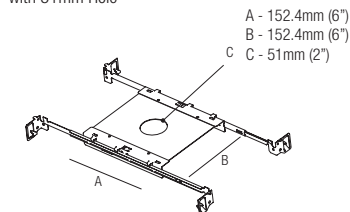

IC Housings

IC064R01051
Recessed Box for
Insulated Ceiling
with 51mm Hole

AT064R01051
Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole




LOLLO 10

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W



FLEXALIGHTING
NORTH AMERICA

Photometric diagrams

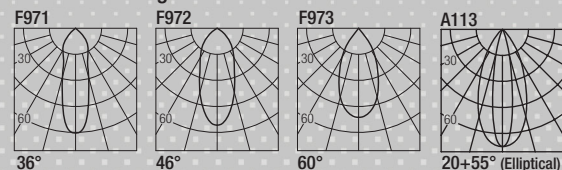

CCT	Flux	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

LL1 | X | XX | 9 | X


LL1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Turnable White	Phase / 0-10V (Dual Dimming)
500mA	Please consult manufactory for driver option

L001


Low luminance louver

Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-Q070
Mounting Plate
with 70mm Hole



T-Bar Installation


Q01070
Mounting Plate
with 70mm Hole



IC Housings

IC064Q01070
Recessed Box for
Insulated Ceiling
with 70mm Hole


AT064Q01070
Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




LOLLO X120

design: Lapo Grassellini


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2 x 18V)

Power
 Pouissance
 Potencia
2 x 10W

FLEXALIGHTING
 NORTH AMERICA



Photometric diagrams

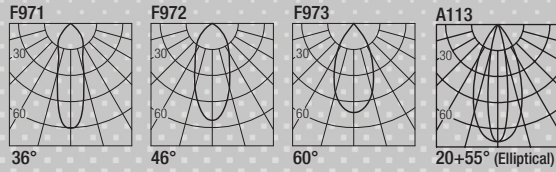

CCT	Flux _(x2)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

LLX12 X XX 9 X


LLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
				30 3000K			M 46°
		5 Black Noir Negro		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
		C Custom Personnalisée Personalizado		DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A x2 Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A x2 Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

2 x L001

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria



T-Bar Installation

X02135

Mounting Plate
 with 135x70mm Hole

MP-X135

Mounting Plate
 with 135x70mm Hole




IC Housings

IC086X02135

Recessed Box for
 Insulated Ceiling
 with 135x70mm Hole

AT086X02135


Air Tight Recessed
 Box for Insulated
 Ceiling with
 135x70mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.2

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 26W




LOLLO X130

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 3 x 18V)

Power
Pouissance
Potencia
3 x 10W

FLEXALIGHTING
NORTH AMERICA

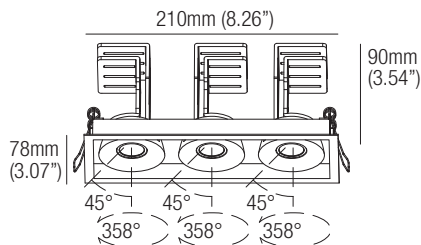

Photometric diagrams

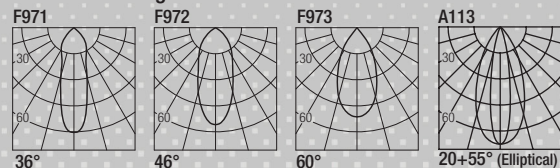

CCT	Flux _(x3)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LLX13 | X | XX | 9 | X |


LLX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

3 x L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria

MP-X200


Mounting Plate
with 200x70mm Hole



T-Bar Installation

X03200

Mounting Plate
with 200x70mm Hole

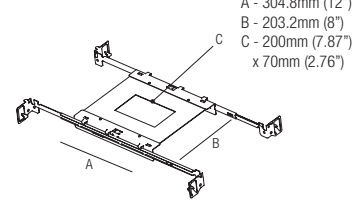


IC Housings

IC127X03200

Recessed Box for
Insulated Ceiling
with 200x70mm Hole

AT127X03200


Air Tight Recessed
Box for Insulated
Ceiling with
200x70mm Hole



Optionals - Accessoires - Accesorios

3 x DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



MILO 10



design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA

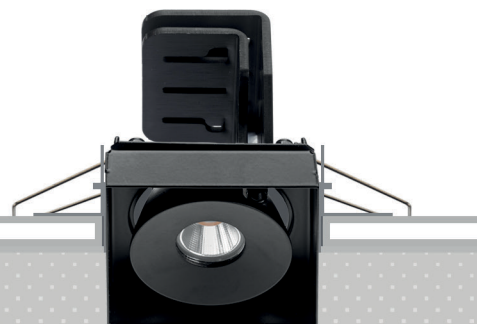

Photometric diagrams

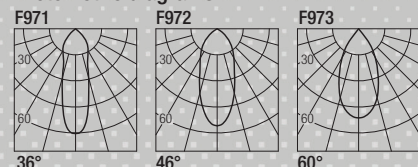

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

ML1 | X | XX | 9 | X |


ML1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

L001

Low luminance louvre


Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria

MP-Q077


Mounting Plate
 with 77mm Hole



T-Bar Installation

Q01077


Mounting Plate
 with 77mm Hole

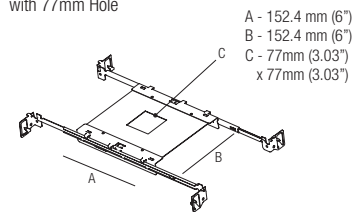

IC Housings

IC064Q01077
 Recessed Box for
 Insulated Ceiling
 with 77mm Hole

AT064Q01077
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 77mm Hole




Accessories - Accessoires - Accesorios

MLX11Q

Plasterboard recessing frame

Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso




Hole Cut:
 77mm
 (3.03")

MLX11Q.WF

Backmount frame

Pierre/bois montage arrière
 Roca/madera montaje trasero




Hole Cut:
 77mm
 (3.03")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W





TRIMLESS DOWNLIGHTS


MILO X120

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2 x 18V)

Power
Pouissance
Potencia
2 x 10W

FLEXALIGHTING
NORTH AMERICA

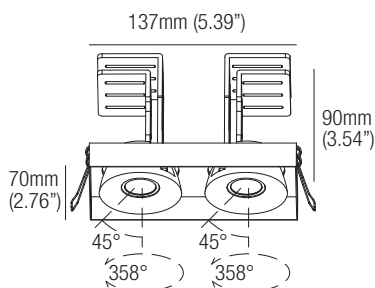

Photometric diagrams

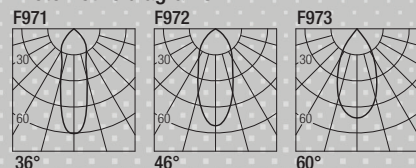

CCT	Flux _(x2)	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MLX12 | X | XX | 9 | X |


MLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S 36°	
		5 Black Noir Negro		30 3000K		M 46°	
		C Custom Personnalisée Personalizado		35 3500K		W 60°	
				40 4000K		D 20+55° (Elliptical)	
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

2 x L001

Low luminance louvre


Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-X144


Mounting Plate
with 144x77mm Hole



T-Bar Installation

XO2144

Mounting Plate
with 144x77mm Hole

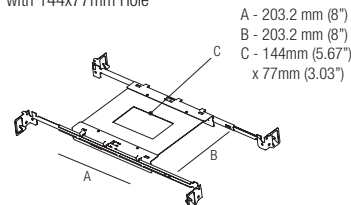


IC Housings

IC086XO2144

Recessed Box for
Insulated Ceiling
with 144x77mm Hole

AT086XO2144

Air Tight Recessed
Box for Insulated
Ceiling with
144x77mm Hole




Accessories - Accessoires - Accesorios

MLX12Q

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
77mm x 144mm
(3.03" x 5.67")

MLX12Q.WF

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero




Hole Cut:
77mm x 144mm
(3.03" x 5.67")

Optionals - Accessoires - Accesorios

DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W




MILO X130


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 3 x 18V)

Power
Pouissance
Potencia
3 x 10W

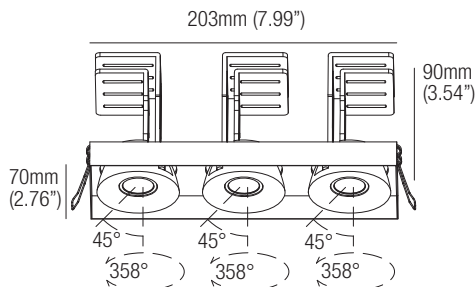

Photometric diagrams

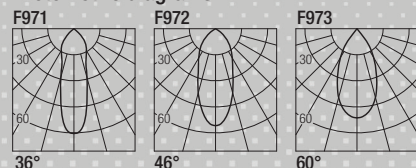

CCT	Flux _(x3)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

MLX13 | X | XX | 9 | X |


MLX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	36°
		5 Black Noir Negro		30 3000K		M	46°
		C Custom Personnalisée Personalizado		35 3500K		W	60°
				40 4000K		D	20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

3 x L001

Low luminance louvre


Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-X211


Mounting Plate
with 211x77mm Hole



T-Bar Installation

X03211

Mounting Plate
with 211x77mm Hole

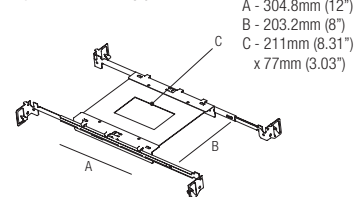


IC Housings

IC127X03211

Recessed Box for
Insulated Ceiling
with 211x77mm Hole

AT127X03211

Air Tight Recessed
Box for Insulated
Ceiling with
211x77mm Hole




Accessories - Accessoires - Accesorios

MLX13Q

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
77mm x 211mm
(3.03" x 8.31")

MLX13Q.WF

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero




Hole Cut:
77mm x 211mm
(3.03" x 8.31")

Optionals - Accessoires - Accesorios

3 x DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



MINE 10

design: Lapo Grassellini

Supply current

Courant d'alimentation
Corriente de alimentación


500mA (V_f 18V)

Power


Pouissance
Potencia

10W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

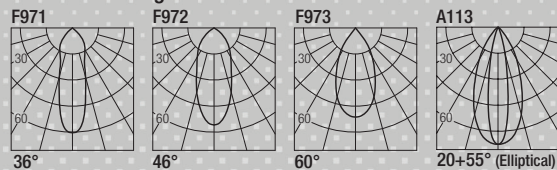

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

MN1 | X | XX | 9 | X


MN1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	27	2700K		S	36°
	5	Black Noir Negro	30	3000K		M	46°
	C	Custom Personnalisée Personalizado	35	3500K		W	60°
			40	4000K		D	20+55° (Elliptical)
			DW	Dim Warm			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

L001


Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria

MP-R070
Mounting Plate
with 70mm Hole



T-Bar Installation


R01070
Mounting Plate
with 70mm Hole

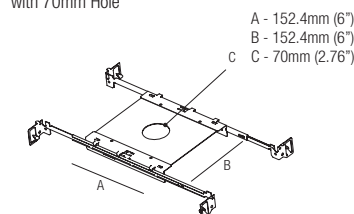

IC Housings

IC064R01070
Recessed Box for
Insulated Ceiling
with 70mm Hole


AT064R01070
Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




MOON Q10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

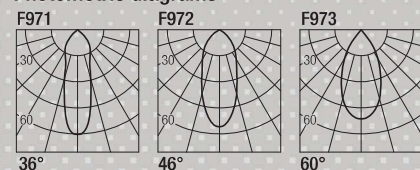

CCT	Flux	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MQ1 | X | XX | 9 | X


MQ1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

LOH1
White
Blanc
Blanco


LOH1B
Black
Noir
Negro

LOH1C
Custom
Personnalisée
Personalizado




MQC002

Plasterboard recessing frame
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
58mm
(2.28")

MP-Q058
Mounting Plate
with 58mm Hole




Q01058
Mounting Plate
with 58mm Hole



MQC002.BMK


Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
58mm
(2.28")

DCVI.B.1


24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



IC Housings

IC064Q01058
Recessed Box for
Insulated Ceiling
with 58mm Hole

AT064Q01058
Air Tight Recessed
Box for Insulated
Ceiling with
58mm Hole





MOON QX120

design: Lapo Grassellini


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2 x 18V)

Power
 Pouissance
 Potencia
2 x 10W

FLEXALIGHTING
 NORTH AMERICA

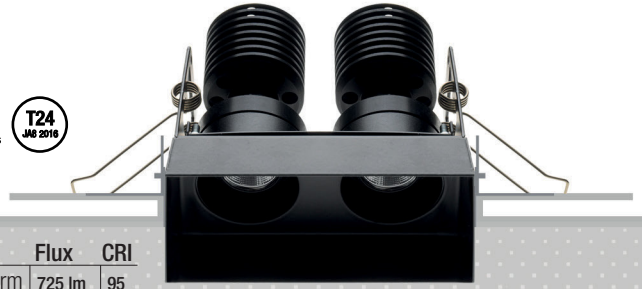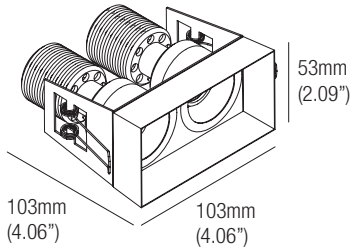

Photometric diagrams

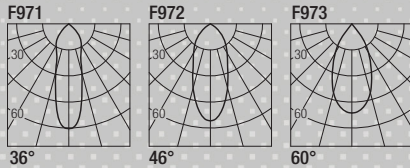

CCT	Flux _(v2)	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

MQX12 | X | XX | 9 | X |


MQX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado			S 36° M 46° W 60°

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A x2 Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A x2 Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia

2 x L0H1	2 x L0H1B	2 x L0H1C
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado




Accessories - Accessoires - Accesorios

MQX12Q

Plasterboard recessing frame

Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso




Hole Cut:
 57mm x 110mm
 (2.24" x 4.33")

MQX12Q.WF

Backmount frame

Pierre/bois montage arrière
 Roca/madera montaje trasero




Hole Cut:
 57mm x 110mm
 (2.24" x 4.33")

Optionals - Accessoires - Accesorios


DCVI.B.2

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 26W



MP-X108


Mounting Plate
 with 108x57mm Hole



T-Bar Installation

X02108

Mounting Plate
 with 108x57mm Hole




IC Housings

IC086X02108

Recessed Box for
 Insulated Ceiling
 with 108x57mm Hole


AT086X02108

Air Tight Recessed
 Box for Insulated
 Ceiling with
 108x57mm Hole



MOON QX130


design: Lapo Grassellini

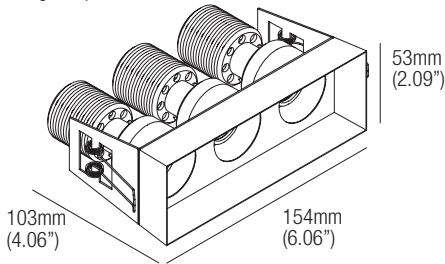


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 3 x 18V)

Power
 Pouissance
 Potencia
3 x 10W

FLEXALIGHTING
 NORTH AMERICA



Photometric diagrams

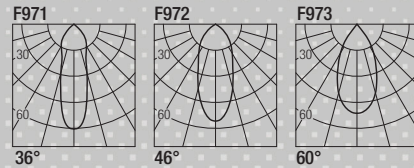

CCT	Flux _(x3)	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

MQX13 | X | XX | 9 | X |


MQX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado			S 36° M 46° W 60°

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A x3 Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A x3 Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options


Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia

3 x LOH1	3 x LOH1B	3 x LOH1C
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado




MP-X161
 Mounting Plate
 with 161x57mm Hole



T-Bar Installation


X03161
 Mounting Plate
 with 161x57mm Hole

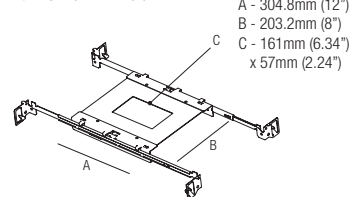

IC Housings

IC127X03161
 Recessed Box for
 Insulated Ceiling
 with 161x57mm Hole


AT127X03161
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 161x57mm Hole



Accessories - Accessoires - Accesorios

MQX13Q


**Plasterboard
 recessing frame**
 Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso



Hole Cut:
 57mm x 161mm
 (2.24" x 6.34")

MQX13Q.WF


Backmount frame
 Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
 57mm x 161mm
 (2.24" x 6.34")

Optionals - Accessoires - Accesorios

3 x DCVI.B.1
 24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W




RAÙL 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W

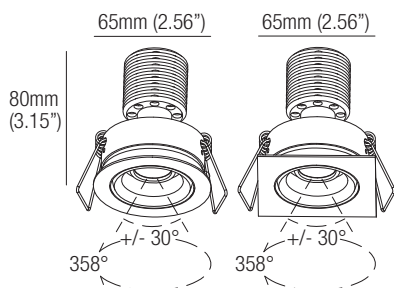

Photometric diagrams

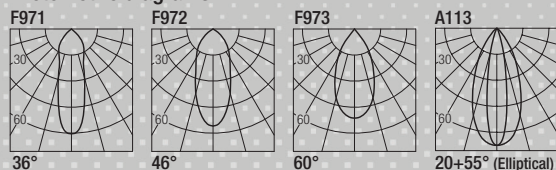

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

R1 | X | X | XX | 9 | X


R1	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		1 White Blanc Blanco		27 2700K		S	36°
		2 Square Carré Cuadrado		5 Black Noir Negro		30 3000K		M	46°
				C Custom Personnalisée Personalizado		35 3500K		W	60°
						40 4000K		D	20+55° (Elliptical)
						DW Dim Warm			
						CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Turnable White 500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

LOH1
White
Blanc
Blanco

LOH1G
Grey
Gris

LOH1B
Black
Noir
Negro


LOH1C
Custom
Personnalisée
Personalizado



Optionals - Accessoires - Accesorios


DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



MP-R060


Mounting Plate
with 60mm Hole



T-Bar Installation

R01060


Mounting Plate
with 60mm Hole



IC Housings


IC064R01060
Recessed Box for
Insulated Ceiling
with 60mm Hole

AT064R01060
Air Tight Recessed
Box for Insulated
Ceiling with
60mm Hole



RAÛL 10 TRIMLESS

design: Lapo Grassellini




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V, 18V)

Power
Puissance
Potencia
10W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

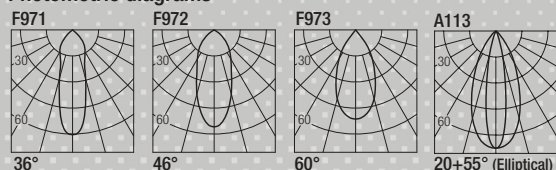

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

RT1 X XX 9 X


RT1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Turnable White 500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia


LOH1
White
Blanc
Blanco

LOH1B
Black
Noir
Negro

LOH1C
Custom
Personnalisée
Personalizado




MP-R090
Mounting Plate
with 90mm Hole



T-Bar Installation


R01090
Mounting Plate
with 90mm Hole

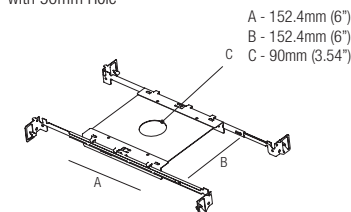

IC Housings

IC064R01090
Recessed Box for
Insulated Ceiling
with 90mm Hole


AT064R01090
Air Tight Recessed
Box for Insulated
Ceiling with
90mm Hole



Accessories - Accessoires - Accesorios

MQC003


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
90mm
(3.54")

MQC003.BMK

Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero




Hole Cut:
80mm
(3.14")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



RAUL 10 UGR


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA



Photometric diagrams

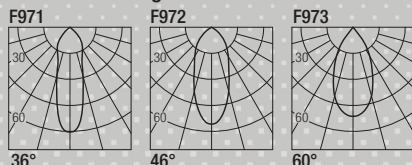

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

RU1 | X | XX | 9 | X


RU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	36°
		5 Black Noir Negro		30 3000K		M	46°
		C Custom Personnalisée Personalizado		35 3500K		W	60°
				40 4000K		D	20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia



LOH1

White
 Blanc
 Blanco


LOH1B

Black
 Noir
 Negro

LOH1G


Grey
 Gris

MP-R080
 Mounting Plate
 with 80mm Hole



T-Bar Installation


R01080
 Mounting Plate
 with 80mm Hole

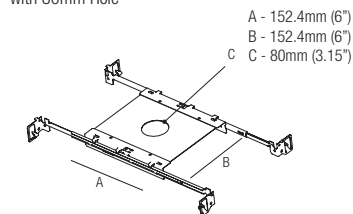

IC Housings

IC086R02080
 Recessed Box for
 Insulated Ceiling
 with 90mm Hole


AT086R02080
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 90mm Hole



Optionals - Accessoires - Accesorios


DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W




ZERO Q6

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)

Power
Puissance
Potencia
4.5W

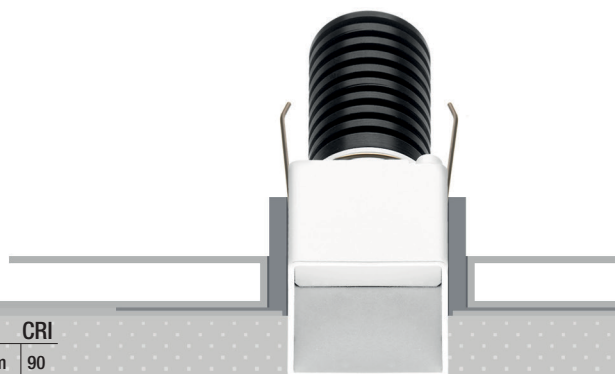

Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

ZW2 | X | X | XX | E


ZW2	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
	C	Custom Personnalisée Personalizado			35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 2
	CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPRO10-A Min. 1 Max. 2
	CCPRO40-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Accessories - Accessoires - Accesorios

ZQC002


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
35mm
(1.38")

MP-Q040


Mounting Plate
with 40mm Hole



T-Bar Installation

Q01040

Mounting Plate
with 40mm Hole




IC Housings

IC064Q01040

Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064Q01040


Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




ZERO R6


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)

Power
Puissance
Potencia
4.5W



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

ZW1 | X | X | XX | E


ZW1	X	Finishing	X	Beam angle	XX	Color Temp.	E
		Finitions Acabados		Angle de faisceau Ángulo del haz		Température couleur Temperatura de color	
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
	C	Custom Personnalisée Personalizado			35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3


L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R045
Mounting Plate
with 45mm Hole



T-Bar Installation


R01045
Mounting Plate
with 45mm Hole



IC Housings

IC064R01045
Recessed Box for
Insulated Ceiling
with 45mm Hole


AT064R01045
Air Tight Recessed
Box for Insulated
Ceiling with
45mm Hole



Accessories - Accessoires - Accesorios

ZQC001


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
45mm
(1.77")

ZQC001.BMK

Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero




Hole Cut:
34mm
(1.34")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W





ZERO R10

design: J. Allen


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W

FLEXALIGHTING
NORTH AMERICA

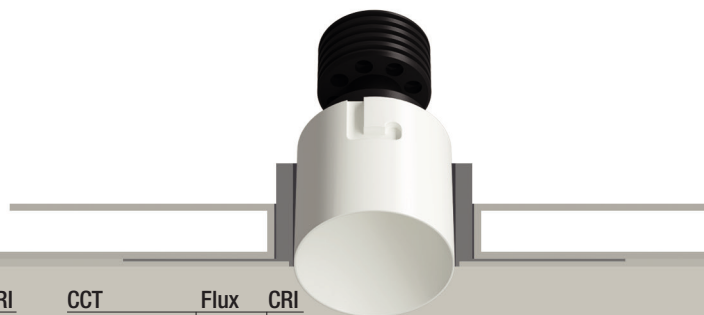

Photometric diagrams

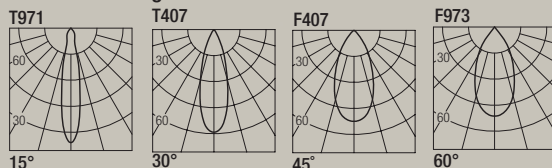

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto


ZR1 X XX 9 X

ZR1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado			1 15° 2 30° 3 45° 4 60°

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring
Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options


L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R060
Mounting Plate
with 60mm Hole



T-Bar Installation


R01060
Mounting Plate
with 60mm Hole

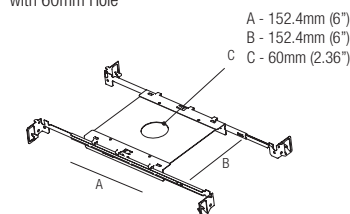

IC Housings

IC064R01060
Recessed Box for
Insulated Ceiling
with 60mm Hole


AT064R01060
Air Tight Recessed
Box for Insulated
Ceiling with
60mm Hole



Accessories - Accessoires - Accesorios

ZQC005


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
60mm
(2.36")

ZQC005.BMK

Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
55mm
(2.16")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

