


ARIK 10

design: Roberto Mantovani



Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V, 18V) (CC)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA



Photometric diagrams

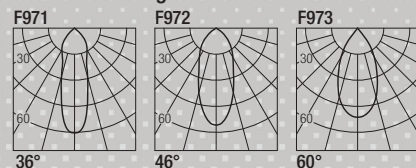

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95



Code Construction

Construction du code produit
 Construcción del código de producto

AH | X | X | XX | CC


AH	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	CC
	1	White Blanc Blanco	S	36°	24	2400K	
	5	Black Noir Negro	M	46°	27	2700K	
	C	Custom Personnalisée Personalizado	W	60°	30	3000K	
					35	3500K	
					40	4000K	
					DW	Dim Warm	
					TW	Tunable White	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Turnable White 500mA	Please consult factory for driver options

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

