



ADAN

design: Roberto Mantovani


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)

Power
Pouissance
Potencia
4.5W

FLEXALIGHTING
NORTH AMERICA

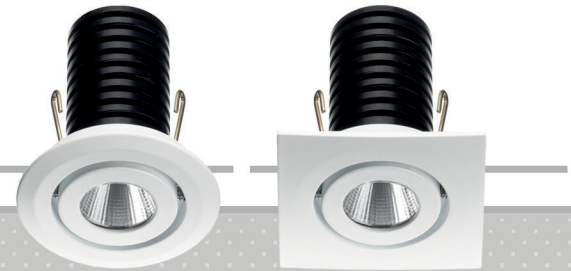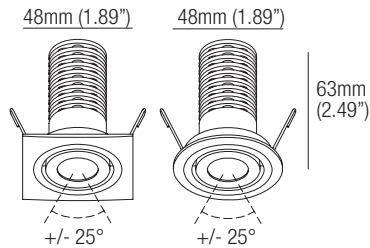

Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

PJ|X|X|X|XX|E


PJ	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	Round Rond Redondo	1	White Blanc Blanco	1	25°	27	2700K	
	2	Square Carré Cuadrado	2	Aluminum Aluminium Aluminio	2	45°	30	3000K	
			3	Chrome Cromo	3	20+55° (Elliptical)	35	3500K	
			4	Gold Or Oro			40	4000K	
			5	Black Noir Negro			DW	Dim Warm	
			6	Bronze Bronce			CU	Custom Personnalisée Personalizado	
			C	Custom Personnalisée Personalizado					

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6

Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria


T-Bar Installation

R01040

Mounting Plate
with 40mm Hole

MP-R040

Mounting Plate
with 40mm Hole

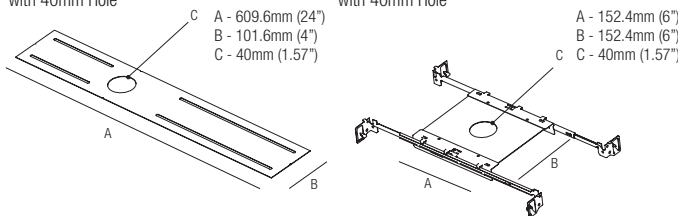


IC Housings

IC064R01040

Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040


Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios

CS1005

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

