


AIR 6

design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Pouissance
Potencia
4.5W

FLEXALIGHTING
NORTH AMERICA

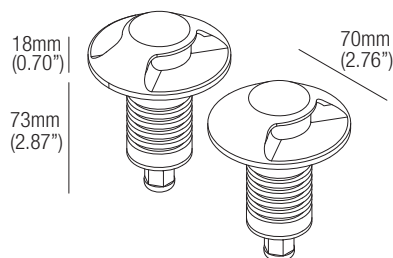

CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm	416 lm	90
2700K	421 lm	98+	1800K-3000K		
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

XR2 | X | X | XX

XR2	X	Emission	X	Finishing	XX	Color Temp.
		Émission		Acabados		Température couleur
		Emisión				Temperatura de color
		1 Single		N Black		24 2400K
		Unique		Noir		27 2700K
		Único		Negro		30 3000K
		2 Double		K COR-TEN		35 3500K
		Doble				40 4000K
				Z INOX		DW Dim Warm
				AISI 316L		CU Custom
				Steel		Personnalisée
				Acier		Personalizado
				Acero		
				C Custom		
				Personnalisée		
				Personalizado		

Note: cable cut to measure on request

Note: câble sur mesure disponible sur demande


Nota: cable a medida disponible a petición

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)

500mA	CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 6
-------	-------------------------------	-------------------------------

Dim to Warm Phase / 0-10V (Dual Dimming)


250mA	CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 3
-------	-------------------------------	-------------------------------

Optionals - Accessoires - Accesorios

CSXT01

Recessing box


Boîtier d'encastrement
Caja de empotrar



CSXT01.CP

Concrete pour

Coulée de béton
Vertido de hormigón



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

