




IP RATED DOWNLIGHTS

ALPHA 10


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_I 18V)

Power
 Pouissance
 Potencia
10W

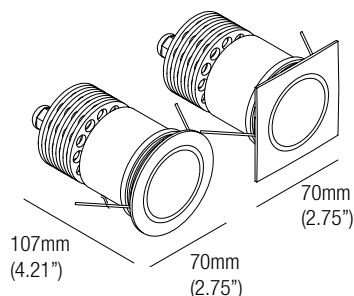

Photometric diagrams




CCT	Flux	CRI
2700K	860 lm	98+
3000K	912 lm	98+
3500K	949 lm	98+
4000K	985 lm	85
† Dim Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto


AP2 | X | X | XX | 9 | 1

AP2	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	1
		1 Round Rond Redondo 2 Square Carré Cuadrado		B White Blanc Blanco G Grey Gris N Black Noir Negro K COR-TEN Z INOX AISI 316L Steel Acier Acero		27 2700K 30 3000K 35 3500K 40 4000K CU Custom		




R01060-WOA
 Mounting Plate
 with 60mm Hole

A - 152.4mm (6")
 B - 152.4mm (6")
 C - 60mm (2.36")

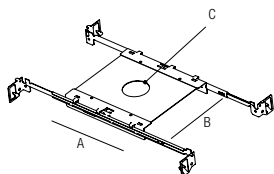

R01060
 Mounting Plate
 with 60mm Hole

A - 152.4mm (6")
 B - 152.4mm (6")
 C - 60mm (2.36")

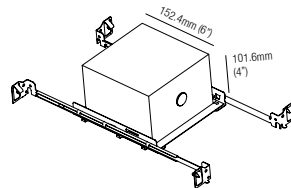


IC064R01060
 Recessed Box for Insulated Ceiling
 with 60mm Hole

AT064R01060
 Air Tight Recessed Box for Insulated
 Ceiling with 60mm Hole

Optionals Accessoires Accesorios

Recessing box
 Boîtier d'encastrement
 Caja de empotrar




Note: cable cut to
 measure on request
Note: câble sur
 mesure disponible
 sur demande
Nota: cable a
 medida disponible a
 petición

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.01%
Min 1./Max. 3 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
 Dimming Range: 10%
Min. 1/Max. 1 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
 Dimming Range: 10%
Min 1./Max. 2 Fixtures per Driver

Lutron Forward Phase

LTEA.1

Hi-Lume Forward Phase
 20W 500mA Constant Current
 Dimming Range: 1%
Min. 1/Max. 2 Fixtures per Driver

LTEA.2

Hi-Lume Forward Phase
 30W 500mA Constant Current
 Dimming Range: 1%
Min. 2/Max. 3 Fixtures per Driver

Lutron Ecosystem

PEQ.1

Hi-Lume ECO System
 20W 500mA Constant Current
 Dimming Range: 1%
Min. 1/Max. 2 Fixtures per Driver

PEQ.0

Hi-Lume ECO System Premier
 20W 500mA Constant Current
 Dimming Range: 0.1%
Min. 1/Max. 2 Fixtures per Driver