



IP RATED DOWNLIGHTS


ALPHA 10

design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 18V)

Power
 Pouissance
 Potencia
10W

FLEXALIGHTING
 NORTH AMERICA

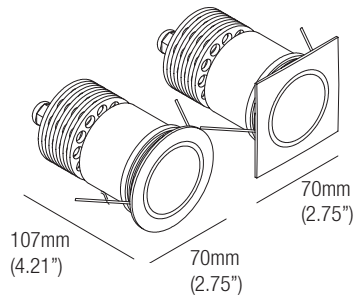

Photometric diagrams



CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

Code Construction

Construction du code produit
 Construcción del código de producto


AP2 | X | X | XX | 9 | 1

AP2	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	1	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		B White Blanc Blanco		24 2400K			1 10°
		2 Square Carré Cuadrado		N Black Noir Negro		27 2700K			
				K COR-TEN		30 3000K			
				Z INOX AISI 316L Steel Acier Acero		35 3500K			
				C Custom Personnalisée Personalizado		40 4000K			
						CU Custom Personnalisée Personalizado			

Drivers (Remote)


Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie




For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White Phase / 0-10V (Dual Dimming)




Dim to Warm Phase / 0-10V (Dual Dimming)



Optionals Accessoires Accesorios


CSXJ01

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



DCVI.B.1


24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W



Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición

MP-R060


Mounting Plate
 with 60mm Hole



T-Bar Installation

R02060

Mounting Plate
 with 60mm Hole



IC Housings

IC086R02060
 Recessed Box for
 Insulated Ceiling with
 60mm Hole

AT086R02060
 Air Tight Recessed Box
 for Insulated Ceiling with
 60mm Hole

