




IP RATED DOWNLIGHTS

ALPHA 2


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W



Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

AP1 | X | X | XX | 5 |


AP1	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	5	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo 2 Square Carré Cuadrado		B White Blanc Blanco N Black Noir Negro K COR-TEN Z INOX AISI 316L Steel Acier Acero C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K CU Custom Personnalisée Personalizado		5 5°

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White Phase / 0-10V (Dual Dimming)

500mA


CCPRO10-A
 Min. 1
 Max. 6

CCPRO40-A
 Min. 1
 Max. 18

Optionals - Accessoires - Accesorios


CSBU01

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



MP-R040


Mounting Plate
 with 40mm Hole



T-Bar Installation

R01040

Mounting Plate
 with 40mm Hole

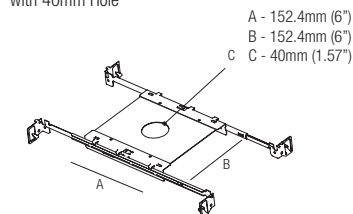

IC Housings

IC064R01040

Recessed Box for
 Insulated Ceiling
 with 40mm Hole

AT064R01040

Air Tight Recessed
 Box for Insulated
 Ceiling with
 40mm Hole

