

ANDREW



design: Andrea Chiaramonti

Supply current
Courant d'alimentation
Corriente de alimentación
250mA (V_i 2.9V)


Power
Puissance
Potencia
0.75W

FLEXALIGHTING

NORTH AMERICA

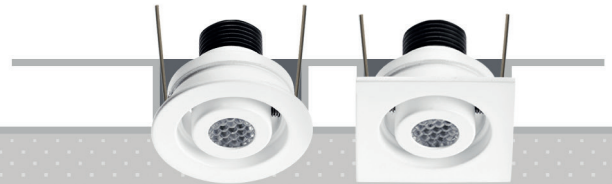

Photometric diagrams



CCT	Flux	CRI
2700K	71 lm	93
3000K	75 lm	93
3500K	86 lm	93
4200K	91 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

AJ | X | X | X | XX |


AJ	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 Round Rond Redondo		1 White Blanc Blanco		1 20°		27 2700K
		2 Square Carré Cuadrado		2 Aluminium Aluminium Aluminio		2 40°		30 3000K
				3 Chrome Cromo				35 3500K
				4 Gold Or Oro				42 4200K
				5 Black Noir Negro				CU Custom Personnalisée Personalizado
				6 Bronze Bronce				
				C Custom Personnalisée Personalizado				

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)

250mA


CCPR010-A
Min. 1
Max. 12

CCPR040-A
Min. 1
Max. 18


Optionals - Accessoires - Accesorios

CSAN01

Recessing box
Boîtier d'encastrement
Caja de empotrar




MP-R025
Mounting Plate
with 25mm Hole



T-Bar Installation

R01025
Mounting Plate
with 25mm Hole



IC Housings

IC064R01025
Recessed Box for
Insulated Ceiling
with 25mm Hole

AT064R01025
Air Tight Recessed
Box for Insulated
Ceiling with
25mm Hole

