




RECESSED OPTICS DOWNLIGHTS


BABA Q6

design: Roberto Mantovani





Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Pouissance
Potencia
4.5W

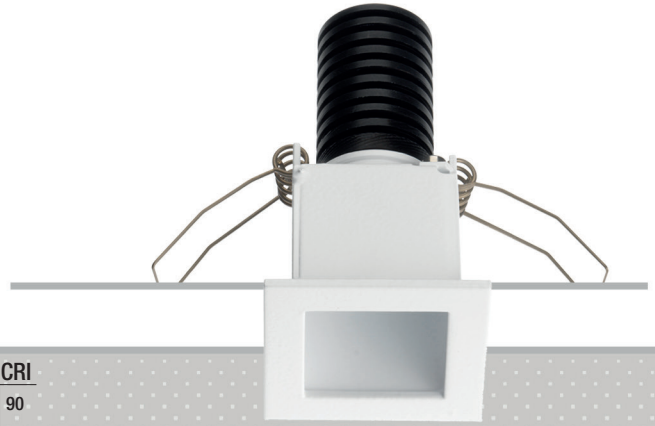

Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm	416 lm	90
2700K	421 lm	98+	1800K-3000K		
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

BW2 | X | X | XX | E


BW2	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	24	2400K	
	5	Black Noir Negro	2	45°	27	2700K	
					30	3000K	
					35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 3

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria

MP-Q040


Mounting Plate
with 40mm Hole



T-Bar Installation

Q01040

Mounting Plate
with 40mm Hole

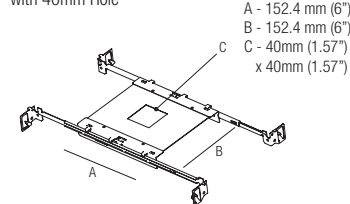


IC Housings

IC064Q01040

Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064Q01040

Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

