

# BABA R10



design: J. Allen

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>f</sub> 18V)


**Power**  
Pouissance  
Potencia  
**10W**

# FLEXALIGHTING

NORTH AMERICA

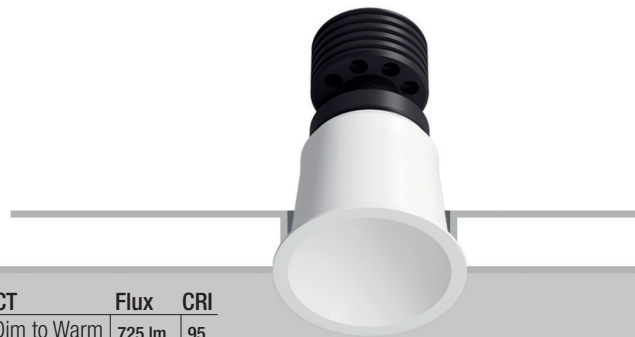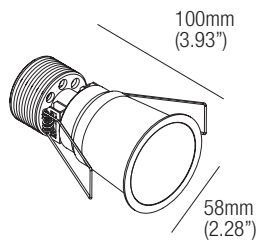

## Photometric diagrams

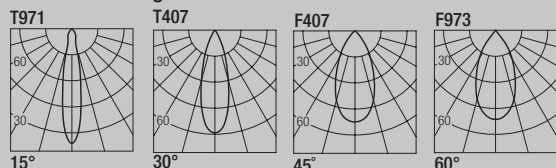

| CCT   | Flux    | CRI |
|-------|---------|-----|
| 2700K | 921 lm  | 98+ |
| 3000K | 977 lm  | 98+ |
| 3500K | 1016 lm | 98+ |
| 4000K | 1055 lm | 98+ |

| CCT                        | Flux   | CRI |
|----------------------------|--------|-----|
| Dim to Warm<br>1800K-3000K | 725 lm | 95  |

## Code Construction

Construction du code produit  
Construcción del código de producto

**BW4 X XX 9 X**


| <b>BW4</b> | <b>X</b> | <b>Finishing</b><br>Finitions<br>Acabados         | <b>XX</b> | <b>Color Temp.</b><br>Température couleur<br>Temperatura de color | <b>9</b> | <b>X</b> | <b>Beam angle</b><br>Angle de faisceau<br>Ángulo del haz |
|------------|----------|---------------------------------------------------|-----------|-------------------------------------------------------------------|----------|----------|----------------------------------------------------------|
|            |          | <b>1</b> White<br>Blanc<br>Blanco                 |           | <b>27</b> 2700K                                                   |          | <b>1</b> | 15°                                                      |
|            |          | <b>5</b> Black<br>Noir<br>Negro                   |           | <b>30</b> 3000K                                                   |          | <b>2</b> | 30°                                                      |
|            |          | <b>C</b> Custom<br>Personnalisée<br>Personalizado |           | <b>35</b> 3500K                                                   |          | <b>3</b> | 45°                                                      |
|            |          |                                                   |           | <b>40</b> 4000K                                                   |          | <b>4</b> | 60°                                                      |
|            |          |                                                   |           | <b>DW</b> Dim Warm                                                |          |          |                                                          |
|            |          |                                                   |           | <b>CU</b> Custom<br>Personnalisée<br>Personalizado                |          |          |                                                          |

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

| Static White   | Phase / 0-10V (Dual Dimming)                                                          |
|----------------|---------------------------------------------------------------------------------------|
| 500mA          | <div>CCPR010-A<br/>Min. 1<br/>Max. 1</div> <div>CCPR040-A<br/>Min. 1<br/>Max. 3</div> |
| Dim to Warm    | Phase / 0-10V (Dual Dimming)                                                          |
| 400mA          | <div>CCPR010-A<br/>Min. 1<br/>Max. 1</div> <div>CCPR040-A<br/>Min. 1<br/>Max. 3</div> |
| Turnable White |                                                                                       |
| 500mA          | Please consult factory for driver options                                             |


## L001

**Low luminance louvre**  
Filtre basse luminance  
Filtro de baja luminancia




**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria

**MP-R051**  
Mounting Plate  
with 51mm Hole

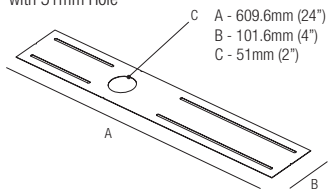


**T-Bar Installation**  
**R01051**  
Mounting Plate  
with 51mm Hole

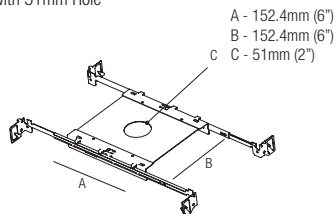

## IC Housings

**IC064R01051**  
Recessed Box for  
Insulated Ceiling  
with 51mm Hole

**AT064R01051**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
51mm Hole

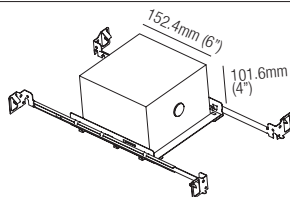

## Optionals - Accessoires - Accesorios

### DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W

