


BABA R6

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)


Power
Puissance
Potencia
4.5W



FLEXALIGHTING

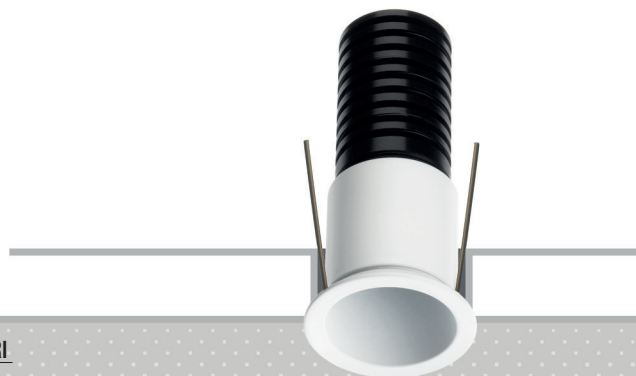NORTH AMERICA


Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

BW1 | X | X | XX | E


BW1	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
	C	Custom Personnalisée Personalizado			35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 3

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria


MP-R030

Mounting Plate
with 30mm Hole



RO1030


Mounting Plate
with 30mm Hole

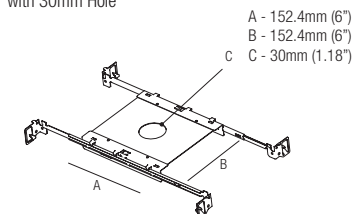

IC Housings

IC064R01030
Recessed Box for
Insulated Ceiling
with 30mm Hole


AT064R01030
Air Tight Recessed
Box for Insulated
Ceiling with
30mm Hole



Optionals - Accessoires - Accesorios

CS1006

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

