




IP RATED DOWNLIGHTS

# BABUS 2

design: Roberto Mantovani

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>f</sub> 2.9V)**


**Power**  
Pouissance  
Potencia  
**1.5W**



**FLEXALIGHTING**  
NORTH AMERICA



## Photometric diagrams

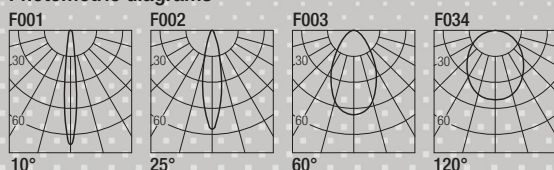

| CCT   | Flux   | CRI |
|-------|--------|-----|
| 2700K | 128 lm | 93  |
| 3000K | 133 lm | 93  |
| 3500K | 143 lm | 93  |
| 4000K | 154 lm | 93  |

## Code Construction

Construction du code produit  
Construcción del código de producto

**BT1 | X | XX | X**


| BT1 | X | Beam angle<br>Angle de faisceau<br>Ángulo del haz | XX | Color Temp.<br>Température couleur<br>Temperatura de color                                  | X | Finishing<br>Finitions<br>Acabados                                                                                |
|-----|---|---------------------------------------------------|----|---------------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------------------------------------|
|     |   | 0 10°<br>1 25°<br>2 60°<br>9 120°                 |    | 27 2700K<br>30 3000K<br>35 3500K<br>40 4000K<br>CU Custom<br>Personnalisée<br>Personalizado |   | B White<br>Blanc<br>Blanco<br>N Black<br>Noir<br>Negro<br>K COR-TEN<br>C Custom<br>Personnalisée<br>Personalizado |

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White

500mA

Phase / 0-10V (Dual Dimming)

CCPRO10-A  
Min. 1  
Max. 6

CCPRO40-A  
Min. 1  
Max. 18

## L001

### Low luminance louvre


Filtre basse luminance  
Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Note:** el filtro debe pedirse junto con la luminaria

## MP-R040


Mounting Plate  
with 40mm Hole



## T-Bar Installation

### R02040

Mounting Plate  
with 40mm Hole

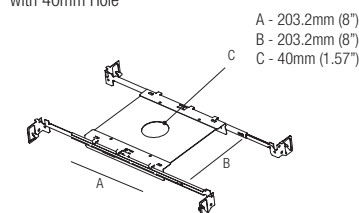


## IC Housings

### IC086R02040

Recessed Box for  
Insulated Ceiling with  
40mm Hole

### AT086R02040

Air Tight Recessed  
Box for Insulated  
Ceiling with  
40mm Hole



## Optionals - Accessoires - Accesorios

### CSBU01

#### Recessing box

Boîtier d'encastrement  
Caja de empotrar

