




IP RATED DOWNLIGHTS

BABUS 6

design: Roberto Mantovani



Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)


Power
Puissance
Potencia
4.5W



FLEXALIGHTING
NORTH AMERICA



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm	416 lm	90
2700K	421 lm	98+	1800K-3000K		
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

BT2 | X | XX | X | E


BT2	X	Beam angle	XX	Color Temp.	X	Finishing	E
		Angle de faisceau Ángulo del haz		Température couleur Temperatura de color		Finitions Acabados	
	1	25°		24		B	
	2	45°		27		Black	
				30		Noir	
				35		Negro	
				40		K	
				DW		COR-TEN	
				CU		Custom	
						Personnalisée	
						Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 2
	CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPRO10-A Min. 1 Max. 2
	CCPRO40-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria


T-Bar Installation

R02040

Mounting Plate
with 40mm Hole

MP-R040

Mounting Plate
with 40mm Hole

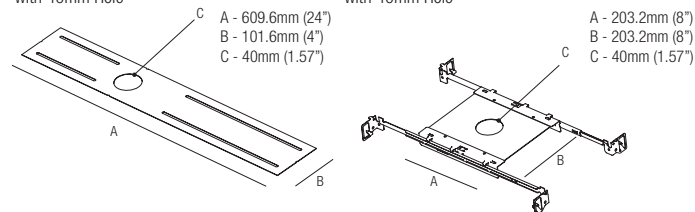


IC Housings

IC086R02040

Recessed Box for
Insulated Ceiling with
40mm Hole

AT086R02040


Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios

CSBU01

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

