


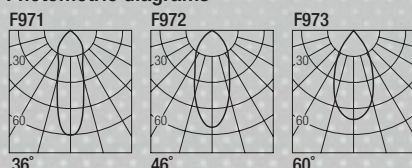


BLACK 10

design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación**500mA** (V_i 18V)**Power**
Pouissance
Potencia**10W**

Photometric diagrams



CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction


Construction du code produit
Construcción del código de producto**BK3 X XX 9 X**

BK3	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K		S 36°	
		5 Black Noir Negro		27 2700K		M 46°	
		C Custom Personnalisée Personalizado		30 3000K		W 60°	
				35 3500K			
				40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)


Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serieFor other driver options -
including Lutron, Dali and DMX -
please consult factory


Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

MP-R055

Mounting Plate
with 55mm Hole

T-Bar Installation

R01055


Mounting Plate
with 55mm Hole

IC Housings

IC064R01055

Recessed Box for
Insulated Ceiling
with 55mm Hole

AT064R01055

Air Tight Recessed
Box for Insulated
Ceiling with
55mm Hole

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W