




BLACK 6


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 8.7V)

Power
 Puissance
 Potencia
4.5W



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

BK2 | X | XX | X | E


BK2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S 25°
		5 Black Noir Negro		30 3000K		M 45°
		C Custom Personnalisée Personalizado		35 3500K		
				40 4000K		
				DW Dim Warm		
				CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie




For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPRO10-A Min. 1 Max. 2 CCPRO40-A Min. 1 Max. 3

MP-R045


Mounting Plate
 with 45mm Hole



T-Bar Installation

R01045

Mounting Plate
 with 45mm Hole

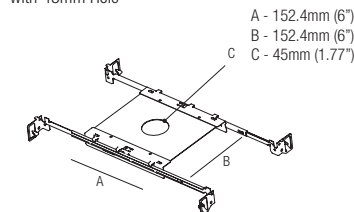


IC Housings

IC064R01045

Recessed Box for
 Insulated Ceiling
 with 45mm Hole

AT064R01045

Air Tight Recessed
 Box for Insulated
 Ceiling with
 45mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

