




BULL 10

design: Lapo Grassellini



Supply current
Courant d'alimentation
Corriente de alimentación
120VAC

Power
Puissance
Potencia
10W




IP20




Photometric diagrams


F971



F972




F973



CCT Flux CRI

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95

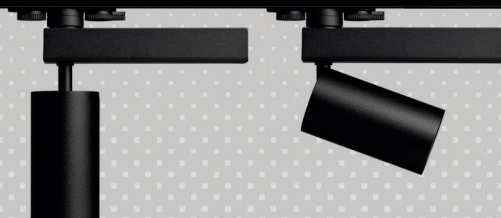

Code Construction

Construction du code produit
Construcción del código de producto

BU1 X X XX 9 X X

BU1	X	Color of the cylinder Couleur du cylindre Color del cilindro	X	Body color Couleur du corps Color del cuerpo	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz	X	No. Circuits Nu. Circuiti
		1 White Blanc Blanco				24 2400K			S 36°		1 1 Circuit
		5 Black Noir Negro				27 2700K			M 46°		2 3 Circuits
		C Custom Personnalisée Personalizado				30 3000K			W 60°		
						35 3500K					
						40 4000K					
						DW Dim Warm					
						CU Custom Personnalisée Personalizado					

Optionals - Accessoires - Accesorios

BUX1NA

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



BUX1FL

Adjustable barn door flaps
Volets orientables anti-éblouissement
Aletas direccionales

