


BULL 10 BASE


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

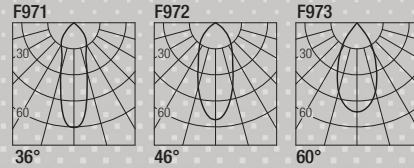

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			



Code Construction

Construction du code produit
Construcción del código de producto

BB1|X|X|XX|9|X|

BB1	X	Color of the cylinder Couleur du cylindre Color del cilindro	X	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado			24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm TW Tunable White CU Custom Personnalisée Personalizado		S 36° M 46° W 60°	

Optionals - Accessoires - Accesorios


BUX1NA

Low luminance louver
Filtre basse luminance
Filtro de baja luminancia




BUX1FL

Adjustable barn door flaps
Volets orientables anti-éblouissement
Aletas direccionales



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	Phase / 0-10V (Dual Dimming)
500mA	Please consult manufactory for driver option