


BULL 20/30 PRECISION

design: Lapo Grassellini

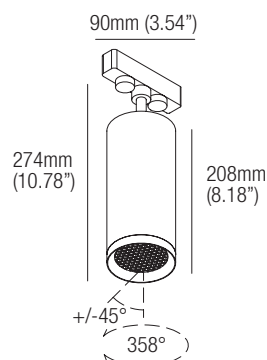


Supply current
Courant d'alimentation
Corriente de alimentación
120VAC

Power
Puissance
Potencia
20W-30W



Photometric diagrams

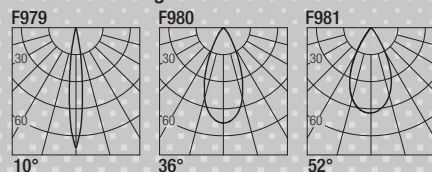

20W			30W		
CCT	Flux	CRI	CCT	Flux	CRI
2700K	1659 lm	93	2700K	2380 lm	93
3000K	1752 lm	93	3000K	2560 lm	93
3500K	1873 lm	93	3500K	2645 lm	93
4000K	1925 lm	93	4000K	2730 lm	93



Code Construction

Construction du code produit
Construcción del código de producto

BP|X|X|XX|9|X|X|

BP	X	Power Puissance Potencia	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz	X	No. Circuits Nu. Circuiti
		2 20W 3 30W		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K CU Custom Personnalisée Personalizado			S 10° M 36° W 52°		1 1 Circuit 2 3 Circuits

Optionals - Accessoires - Accesorios

BUX2NA - Included With Assembly

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

