


CORE 20


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 36V)

Power
Puissance
Potencia
20W



Photometric diagrams

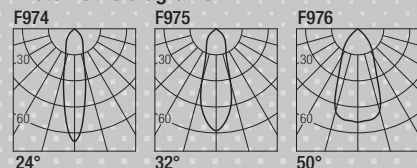

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93



Code Construction

Construction du code produit
Construcción del código de producto

C2 | X | XX | 9 | X


C2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	24°
		5 Black Noir Negro		30 3000K		M	32°
		C Custom Personnalisée Personalizado		35 3500K		W	50°
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)

500mA

CCPR040-A
Min. 1
Max. 1

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia



LOH2

White
Blanc
Blanco

LOH2B

Black
Noir
Negro


LOH2G

Grey
Gris

Optionals - Accessoires - Accesorios


DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



MP-R075


Mounting Plate
with 75mm Hole



T-Bar Installation

R02075

Mounting Plate
with 75mm Hole

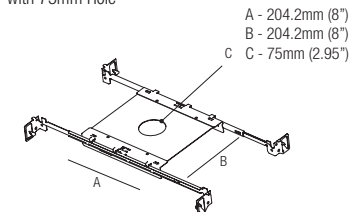

IC Housings

IC086R02075

Recessed Box for
Insulated Ceiling
with 75mm Hole

AT086R02075

Air Tight Recessed
Box for Insulated
Ceiling with
75mm Hole

