


CUBE 20/30

design: Roberto Mantovani



Supply current
Courant d'alimentation
Corriente de alimentación

500mA, 36V
700mA, 36V

Power
Pouissance
Potencia


20W
30W



FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

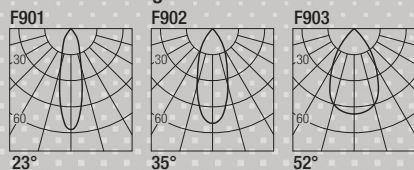

20W

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

30W

CCT	Flux	CRI
2700K	2380 lm	93
3000K	2560 lm	93
3500K	2645 lm	93
4000K	2730 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

CU | X | X | XX | 9 | X |


CU	X	Power Pouissance Potencia	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		2 20W 3 30W		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K CU Custom Personnalisée Personalizado			S 23° M 35° W 52°

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA 20W	CCPRO40-A Min. 1 Max. 1
Static White	Phase / 0-10V (Dual Dimming)
700mA 30W	CCPRO40-A Min. 1 Max. 1