


DAHLIA


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2.9V)

Power
Pouissance
Potencia
1.5W

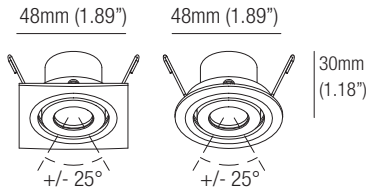

Photometric diagrams

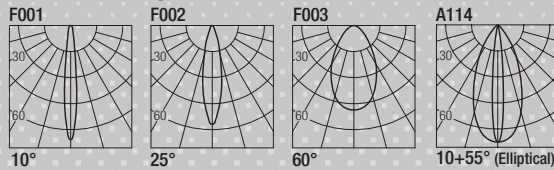

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

SJ | X | X | X | XX


SJ	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 Round Rond Redondo		1 White Blanc Blanco		0 10°		27 2700K
		2 Square Carré Cuadrado		2 Aluminum Aluminium Aluminio		1 25°		30 3000K
				3 Chrome Cromo		2 60°		35 3500K
				4 Gold Or Oro		3 10+55° (Elliptical)		40 4000K
				5 Black Noir Negro				CU Custom Personnalisée Personalizado
				6 Bronze Bronze				
				C Custom Personnalisée Personalizado				

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory


Static White Phase / 0-10V (Dual Dimming)

500mA	CCPR010-A Min. 1 Max. 6	CCPR040-A Min. 1 Max. 18
-------	-------------------------------	--------------------------------


Optionals - Accessoires - Accesorios

CS1005

Recessing box
Boîtier d'encastrement
Caja de empotrar




MP-R040
Mounting Plate
with 40mm Hole



T-Bar Installation

R01040
Mounting Plate
with 40mm Hole

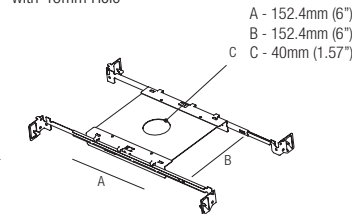

IC Housings

IC064R01040
Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole

