


ELIA R10


design: J. Allen

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 18V)


Power
 Pouissance
 Potencia
10W



Photometric diagrams

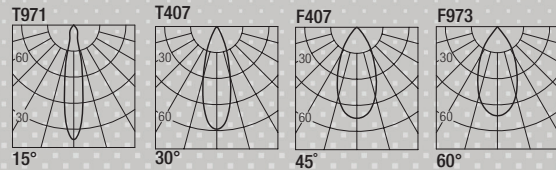

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95

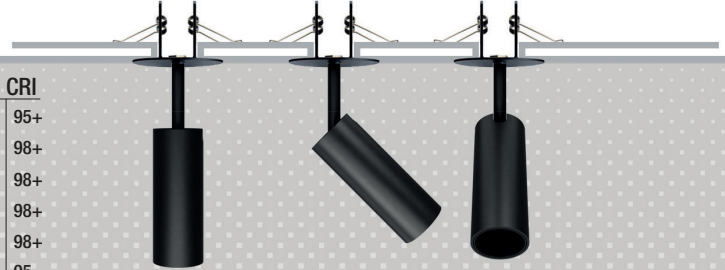

Code Construction

Construction du code produit
 Construcción del código de producto

ELIR10 | X | X | XX |


ELIR10	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		S 15°		24 2400K
		5 Black Noir Negro		M 30°		27 2700K
		C Custom Personnalisée Personalizado		F 45°		30 3000K
				W 60°		35 3500K
						40 4000K
						DW Dim Warm
						CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre


Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040


Mounting Plate
 with 40mm Hole



T-Bar Installation

R01040

Mounting Plate
 with 40mm Hole

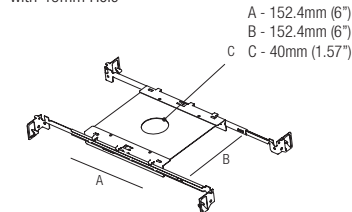


IC Housings

IC064R01040

Recessed Box for
 Insulated Ceiling
 with 40mm Hole

AT064R01040

Air Tight Recessed
 Box for Insulated
 Ceiling with
 40mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

