

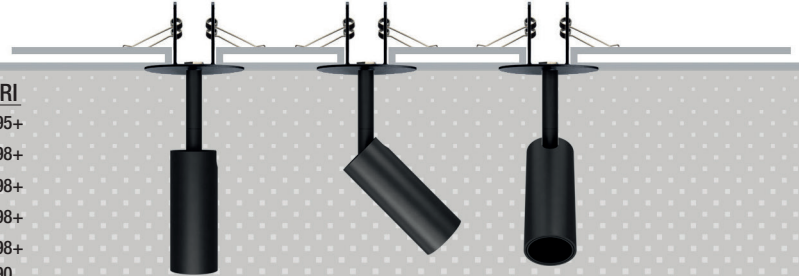


ELIA R6


design: J. Allen

Supply current
Courant d'alimentation
Corriente de alimentación**500mA** (V_i 8.7V)**Power**
Pouissance
Potencia**4.5W****Photometric diagrams**


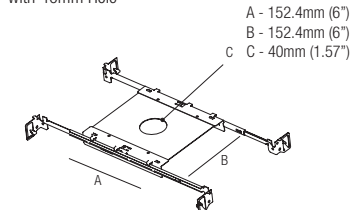


CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90

**Code Construction**Construction du code produit
Construcción del código de producto**ELIR6 | X | X | XX |**

ELIR6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		S 25°		24 2400K
		5 Black Noir Negro		M 45°		27 2700K
		C Custom Personnalisée Personalizado				30 3000K
						35 3500K
						40 4000K
						DW Dim Warm
						CU Custom Personnalisée Personalizado

Drivers (Remote)Alimentateurs
Alimentadores**Series wiring**
Câblage en série
Cableado en serieFor other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2 CCPR040-A Min. 1 Max. 3

L001**Low luminance louvre**Filtre basse luminance
Filtro de baja luminancia**Note:** the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria**MP-R040**
Mounting Plate
with 40mm Hole**T-Bar Installation****R01040**
Mounting Plate
with 40mm Hole**IC Housings****IC064R01040**
Recessed Box for
Insulated Ceiling
with 40mm Hole**AT064R01040**
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole**Optionals - Accessoires - Accesorios****DCVI.B.1**24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W**Note:** versions with extended arm length are available upon request
Nota: versioni con lunghezza del braccetto maggiorata disponibili su richiesta
Note: versions avec longueur du bras majorée disponibles sur demande