



ELIA S6

design: J Allen

Mini Canopy for Remote Wiring



Standard Canopy for JBox Wiring

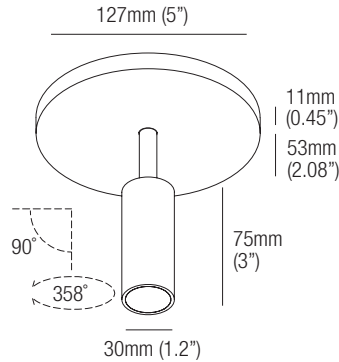


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Pouissance
Potencia
4.5W



Photometric diagrams



CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90

Code Construction

Construction du code produit
Construcción del código de producto

ELS6 | X | X | XX | X |


ELS6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Canopy Canopée Cubierta
		1 White Blanc Blanco		S 25°		24 2400K		1 Mini
		5 Black Noir Negro		M 45°		27 2700K		2 Standard
		C Custom Personnalisée Personalizado				30 3000K		
						35 3500K		
						40 4000K		
						DW Dim Warm		
						CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

