

ELIA X6

design: J. Allen


Supply current
Courant d'alimentation
Corriente de alimentación

24VDC


Power
Puissance
Potencia

4.5W


FLEXALIGHTING
NORTH AMERICA

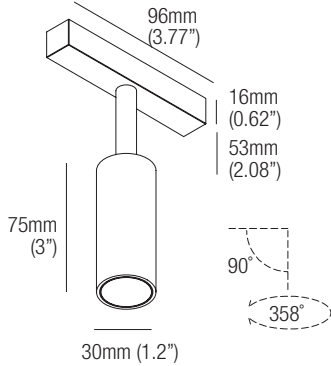

Photometric diagrams



CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90

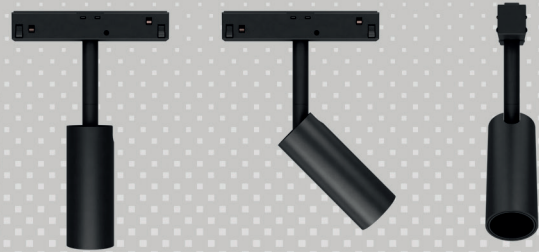

Code Construction

Construction du code produit
Construcción del código de producto

ELIX6 | X | X | XX


ELIX6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		S 25°		24 2400K
		5 Black Noir Negro		M 45°		27 2700K
		C Custom Personnalisée Personalizado				30 3000K
						35 3500K
						40 4000K
						DW Dim Warm
						CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White/DW 0-10V/Phase

CV2496A
Min. 1
Max. 20

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria