


ELIJAH R6

design: J. Allen



Supply current
 Courant d'alimentation
 Corriente de alimentación

500mA (V_f 8.7V)

Power
 Pouissance
 Potencia


4.5W

FLEXALIGHTING


NORTH AMERICA



Photometric diagrams



CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90

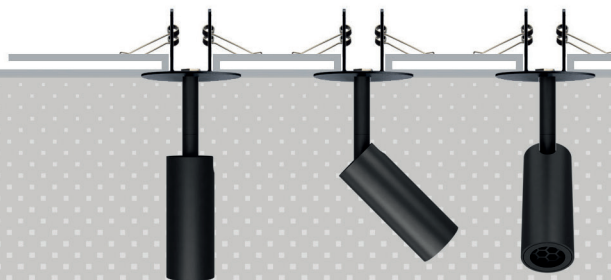

Code Construction

Construction du code produit
 Construcción del código de producto


ELJR6.X.X.XX

ELJR6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		S 25°		24 2400K
		5 Black Noir Negro		M 45°		27 2700K
		C Custom Personnalisée Personalizado				30 3000K
						35 3500K
						40 4000K
						DW Dim Warm
						CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3

L001 (INCLUDED)


Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040
 Mounting Plate
 with 40mm Hole



T-Bar Installation


R01040
 Mounting Plate
 with 40mm Hole

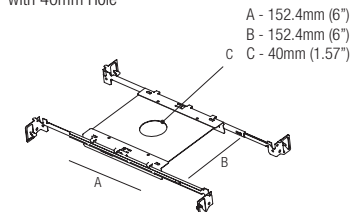

IC Housings

IC064R01040
 Recessed Box for
 Insulated Ceiling
 with 40mm Hole


AT064R01040
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 40mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W



Note: versions with extended arm length are available upon request
Nota: versioni con lunghezza del braccetto maggiorata disponibili su richiesta
Note: versions avec longueur du bras majorée disponibles sur demande