

ELIJAH S10


design: J Allen

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING
 NORTH AMERICA


Mini Canopy for Remote Wiring




Standard Canopy for JBox Wiring



Photometric diagrams

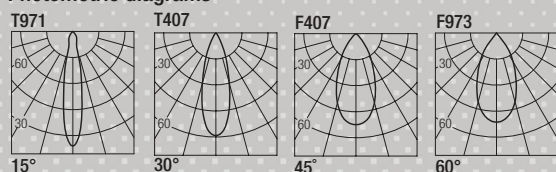

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95

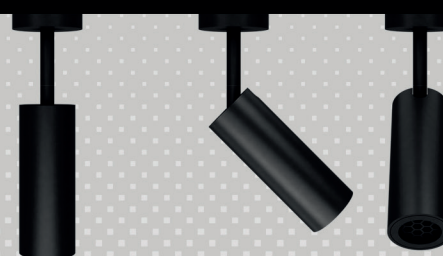

Code Construction

Construction du code produit
 Construcción del código de producto


ELJS10 | **X** | **X** | **XX** | **X** |

ELJS10	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Canopy Canopée Cubierta
		1 White Blanc Blanco		S 15°		24 2400K		1 Mini
		5 Black Noir Negro		M 30°		27 2700K		2 Standard
		C Custom Personnalisée Personalizado		F 45°		30 3000K		
				W 60°		35 3500K		
						40 4000K		
						DW Dim Warm		
						CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3

L001 (INCLUDED)

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Optionals - Accessoires - Accesorios

DCVI.B.1
 24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

