


# ELIJAH S6

design: J Allen


**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>i</sub> 8.7V)

**Power**  
Pouissance  
Potencia  
**4.5W**


## Mini Canopy for Remote Wiring




## Standard Canopy for JBox Wiring

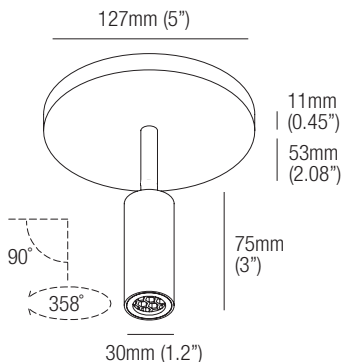

## Photometric diagrams



| CCT                        | Flux   | CRI |
|----------------------------|--------|-----|
| 2400K                      | 472 lm | 95+ |
| 2700K                      | 421 lm | 98+ |
| 3000K                      | 446 lm | 98+ |
| 3500K                      | 464 lm | 98+ |
| 4000K                      | 482 lm | 98+ |
| Dim to Warm<br>1800K-3000K | 416 lm | 90  |

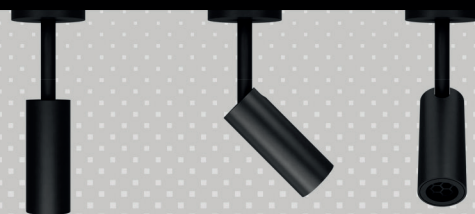

## Code Construction

Construction du code produit  
Construcción del código de producto

ELJS6 | X | X | XX | X |


| ELJS6 | X | Finishing<br>Finitions<br>Acabados | X | Beam angle<br>Angle de faisceau<br>Ángulo del haz | XX | Color Temp.<br>Température couleur<br>Temperatura de color                                                             | X | Canopy<br>Canopée<br>Cubierta |
|-------|---|------------------------------------|---|---------------------------------------------------|----|------------------------------------------------------------------------------------------------------------------------|---|-------------------------------|
|       |   | 1 White<br>Blanc<br>Blanco         |   | S 25°<br>M 45°                                    |    | 24 2400K<br>27 2700K<br>30 3000K<br>35 3500K<br>40 4000K<br>DW Dim Warm<br>CU Custom<br>Personnalisée<br>Personalizado |   | 1 Mini<br>2 Standard          |

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

| Static White | Phase / 0-10V (Dual Dimming)                                   |
|--------------|----------------------------------------------------------------|
| 500mA        | CCPRO10-A<br>Min. 1<br>Max. 2<br>CCPRO40-A<br>Min. 1<br>Max. 6 |
| Dim to Warm  | Phase / 0-10V (Dual Dimming)                                   |
| 250mA        | CCPRO10-A<br>Min. 1<br>Max. 2<br>CCPRO40-A<br>Min. 1<br>Max. 3 |

## L001 (INCLUDED)

**Low luminance louvre**  
Filtre basse luminance  
Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria

## Optionals - Accessoires - Accesorios

### DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W

