

ELIJAH X10

design: J. Allen


Supply current
 Courant d'alimentation
 Corriente de alimentación

24VDC


Power
 Pouissance
 Potencia

10W


FLEXALIGHTING
 NORTH AMERICA

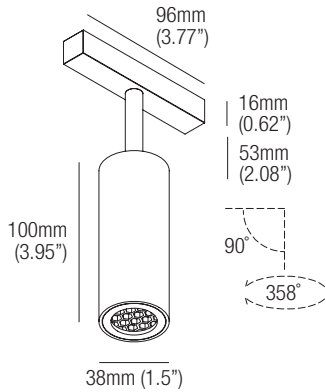

Photometric diagrams

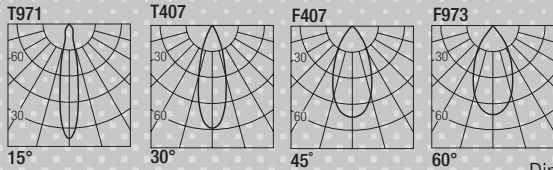

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95

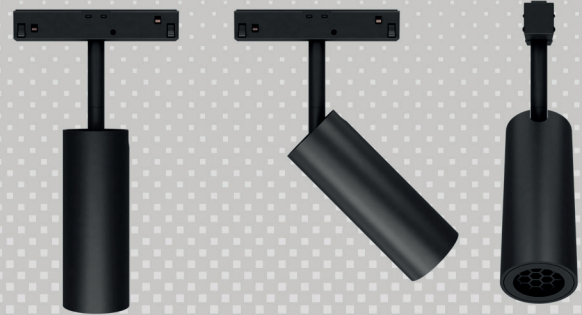

Code Construction

Construction du code produit
 Construcción del código de producto

ELJX10 X X XX


ELJX10	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
	1	White Blanc Blanco	S	15°	24	2400K
	5	Black Noir Negro	M	30°	27	2700K
	C	Custom Personnalisée Personalizado	F	45°	30	3000K
			W	60°	35	3500K
					40	4000K
					DW	Dim Warm
					CU	Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
 Alimentadores

Parallel wiring

Câblage en parallèle
 Cableado en paralelo



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White/DW 0-10V/Phase

CV2496A
 Min. 1
 Max. 9

L001 (INCLUDED)

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria