


ELIJAH X6


design: J. Allen

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Puissance
Potencia
4.5W

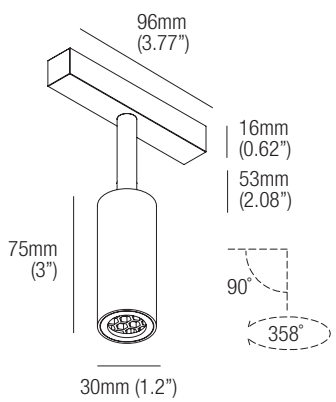

Photometric diagrams



CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90



Code Construction

Construction du code produit
Construcción del código de producto


ELJX6 | X | X | XX |

ELJX6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		S 25° M 45°		24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado
		5 Black Noir Negro				
		C Custom Personnalisée Personalizado				

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring
Câblage en parallèle
Cableado en paralelo



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White/DW 0-10V/Phase

CV2496A
Min. 1
Max. 20

L001 (INCLUDED)

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria