


ELLE 2

design: Roberto Mantovani

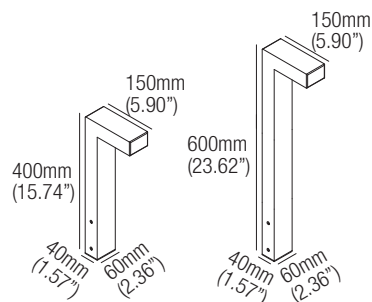

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2.9V)

Power
Puissance
Potencia
1.5W



FLEXALIGHTING
NORTH AMERICA



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

BLS X X X XX


BLS	X	Height Hauteur Altura	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color
		4 40cm (14.74")		1 White Blanc Blanco		27 2700K
		6 60cm (23.62")		5 Black Noir Negro		30 3000K
				9 COR-TEN		35 3500K
				C Custom Personnalisée Personalizado		40 4000K
						CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 6	CCPRO40-A Min. 1 Max. 20

Optionals - Accessoires - Accesorios


ZC001

Anchor bolt for concrete plinth
oulon d'ancrage pour socle en béton
Perno de anclaje para zócalo de hormigón



CP0022

Earth spike
Piquet de terre
Pico de la tierra



Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición