


ELO R10


design: J. Allen

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 18V)


Power
 Pouissance
 Potencia
10W



Photometric diagrams

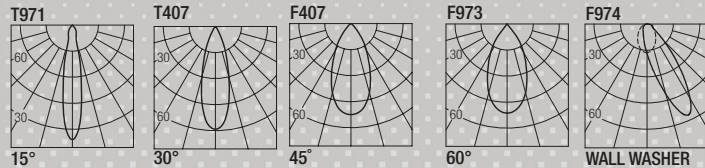

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95

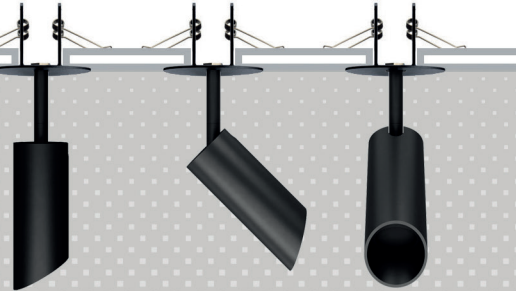

Code Construction

Construction du code produit
 Construcción del código de producto

ELOR10|X|X|XX|


ELOR10	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		S 15°		24 2400K
		5 Black Noir Negro		M 30°		27 2700K
		C Custom Personnalisée Personalizado		F 45°		30 3000K
				W 60°		35 3500K
				D Wall Wash		40 4000K
						DW Dim Warm
						CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3

L001


Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040
 Mounting Plate
 with 40mm Hole



T-Bar Installation


R01040
 Mounting Plate
 with 40mm Hole

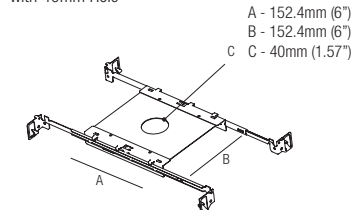

IC Housings

IC064R01040
 Recessed Box for
 Insulated Ceiling
 with 40mm Hole


AT064R01040
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 40mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W



Note: versions with extended arm length are available upon request
Nota: versioni con lunghezza del braccetto maggiorata disponibili su richiesta
Note: versions avec longueur du bras majorée disponibles sur demande