

ELO S10

design: J Allen


Supply current
Courant d'alimentation
Corriente de alimentación

500mA (V_i 18V)


Power
Pouissance
Potencia

10W


Mini Canopy for Remote Wiring

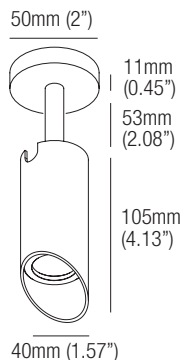

Standard Canopy for JBox Wiring

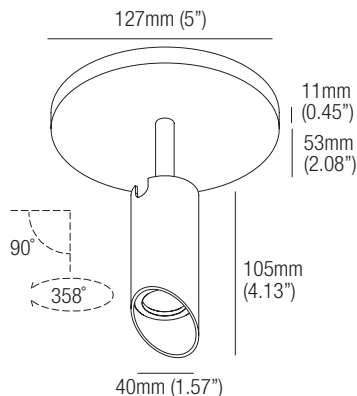

Photometric diagrams

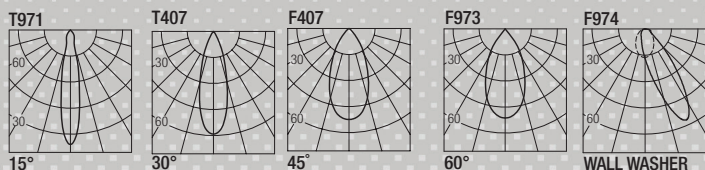

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95



Code Construction

Construction du code produit
Construcción del código de producto

ELOS10|X|X|XX|X|


ELOS10	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Canopy Canopée Cubierta
		1 White Blanc Blanco		S 15°		24 2400K		1 Mini
		5 Black Noir Negro		M 30°		27 2700K		2 Standard
		C Custom Personnalisée Personalizado		F 45°		30 3000K		
				W 60°		35 3500K		
				D Wall Washer		40 4000K		
						DW Dim Warm		
						CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3

Dim to Warm Phase / 0-10V (Dual Dimming)

Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3

L001

Low luminance louver

Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

