

ELO S6

design: J Allen


Supply current
Courant d'alimentation
Corriente de alimentación

Power
Puissance
Potencia


500mA (V_i 8.7V)

4.5W


Mini Canopy for Remote Wiring

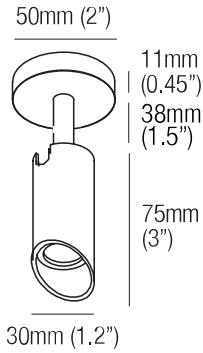


Standard Canopy for JBox Wiring

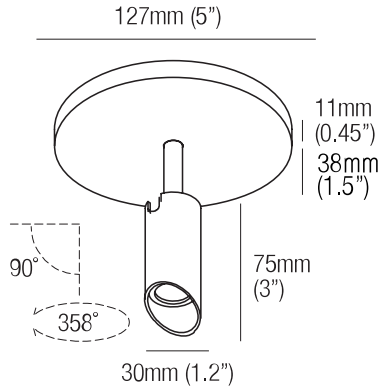

Photometric diagrams

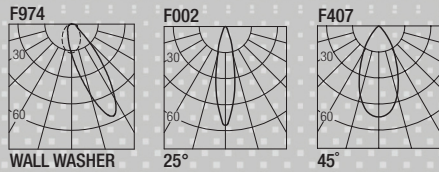

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90

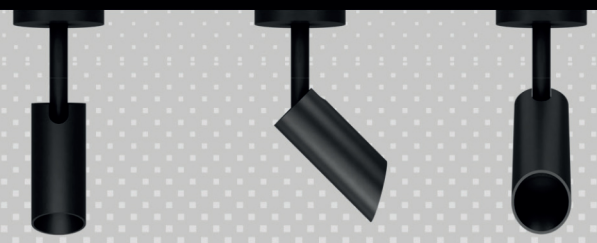

Code Construction


Construction du code produit
Construcción del código de producto

ELOS6 X₁ X₂ XX₁ X₁

ELOS6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Canopy Canopée Cubierta
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		S 25° M 45° D Wall Washer		24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado		1 Mini 2 Standard



Drivers (Remote)

Alimentateurs
Alimentadores

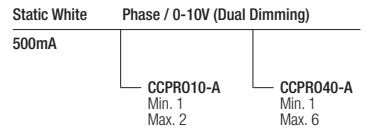

Series wiring

Câblage en série
Cableado en serie

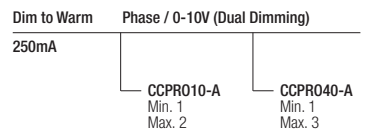

For other driver options - including Lutron, Dali and DMX - please consult factory

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

