



IP RATED DOWNLIGHTS



ERIS

design: Roberto Mantovani


Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Puissance
Potencia
7.5W

FLEXALIGHTING
NORTH AMERICA

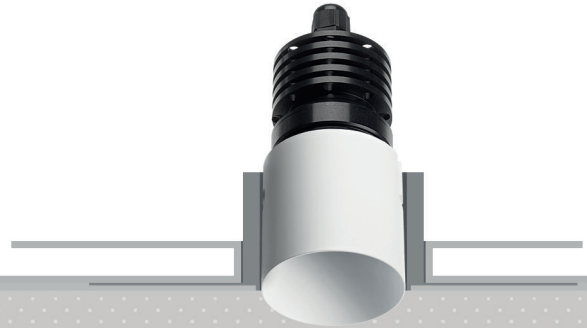

Photometric diagrams

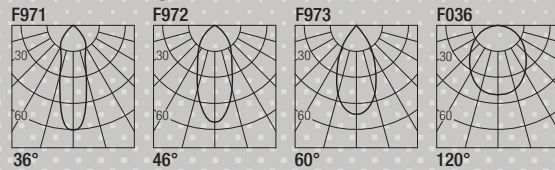

CCT	Flux	CRI
2400K	560 lm	95+
2700K	580 lm	98+
3000K	610 lm	98+
3500K	625 lm	98+
4000K	640 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

ER1 XX 9 X X


ER1	XX	Color Temp. Température couleur Temperatura de color	9	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz
		24 2400K			B White Blanc Blanco	S 36°	
		27 2700K				M 46°	
		30 3000K			N Black Noir Negro	W 60°	
		35 3500K				X 120°	
		40 4000K			C Custom Personnalisée Personalizado		
		CU Custom Personnalisée Personalizado					

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White

0-10V/Phase

DLM.100
Min. 1
Max. 12
DLM.60
Min. 1
Max. 7
DLM.30
Min. 1
Max. 3

LOD1

Low luminance louver

Filtre basse luminance
Filtro de baja luminancia





Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

R02070

Mounting Plate
with 70mm Hole

MP-R070
Mounting Plate
with 70mm Hole




IC Housings

IC086R02070

Recessed Box for
Insulated Ceiling with
70mm Hole

AT086R02070

Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole




Accessories - Accessoires - Accesorios

ZTC10U

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso

44mm
(1.73")




120mm (4.72")

Hole Cut:
70mm
(2.76")

ZTC10U.BMK

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
59mm (2.32")