


FATBOY 2

design: Roberto Mantovani


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V, 2.9V)

Power
 Pouissance
 Potencia
1.5W

FLEXALIGHTING
 NORTH AMERICA



Photometric diagrams

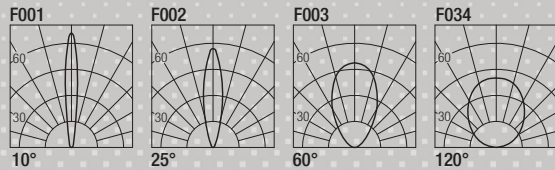

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93



Code Construction

Construction du code produit
 Construcción del código de producto

FB1 | X | X | XX | X |


FB1	X	Shape Forma Forme	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados
		1 Round Rond Redondo		0 10°		27 2700K		N Black Noir Negro
		2 Square Carré Cuadrado		1 25°		30 3000K		K COR-TEN
				2 60°		35 3500K		Z INOX AISI 316L Steel Acier Acero
				9 120°		40 4000K		C Custom Personnalisée Personalizado
						CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory


Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 6
	CCPR040-A Min. 1 Max. 18

Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición

Optionals - Accessoires - Accesorios

CSFB01

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



CSFB01.CP

Concrete pour
 Coulée de béton
 Vertido de hormigón

