

HAP 110



design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA

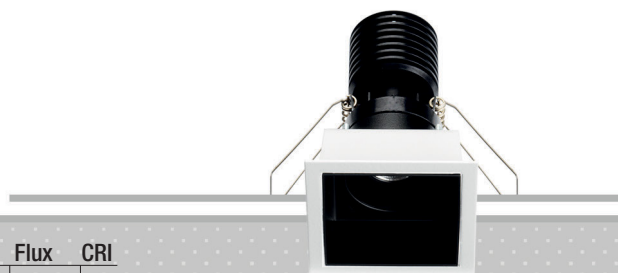

Photometric diagrams

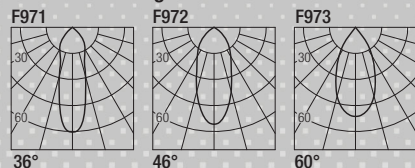

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

HP11|X|XX|9|X|


HP11	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S	36°
		5 Black Noir Negro		30 3000K		M	46°
		C Custom Personnalisée Personalizado		35 3500K		W	60°
				40 4000K			
			DW	Dim Warm			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia

LOH1B


Black
 Noir
 Negro




Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W




MP-Q058
 Mounting Plate
 with 58mm Hole



T-Bar Installation

Q01058
 Mounting Plate
 with 58mm Hole



IC Housings

IC086Q02058
 Recessed Box for
 Insulated Ceiling
 with 58mm Hole

AT086Q02058
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 58mm Hole

