
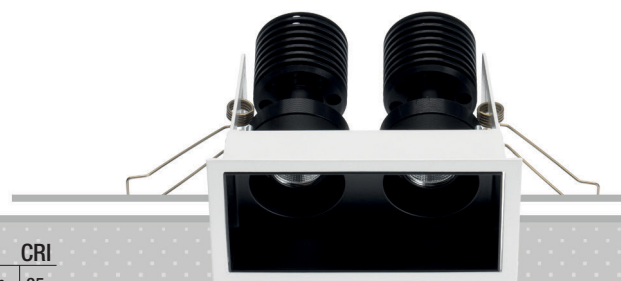


HAP 120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_r 2 x 18V)

Power
Pouissance
Potencia
2 x 10W



Photometric diagrams

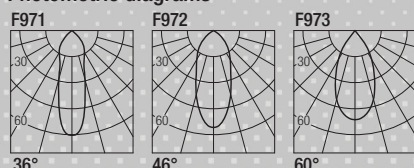

CCT	Flux _(x2)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

HP12 | X | XX | 9 | X |


HP12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

2 x L0H1B


Black
Noir
Negro



Optionals - Accessoires - Accesorios


DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



MP-X108


Mounting Plate
with 108x57mm Hole



T-Bar Installation

X02108

Mounting Plate
with 108x57mm Hole



IC Housings

IC086X02108

Recessed Box for
Insulated Ceiling
with 108x57mm Hole

AT086X02108

Air Tight Recessed
Box for Insulated
Ceiling with
108x57mm Hole

