


HAP 130


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 3 x 18V)

Power
Puissance
Potencia
3 x 10W



Photometric diagrams

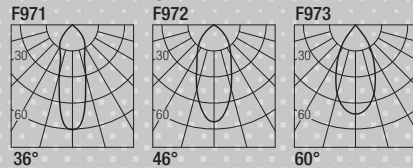

CCT	Flux _(cd)	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			



Code Construction

Construction du code produit
Construcción del código de producto

HP13|X|XX|9|X|


HP13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K		S	36°
		5 Black Noir Negro		27 2700K		M	46°
		C Custom Personnalisée Personalizado		30 3000K		W	60°
				35 3500K			
				40 4000K			
			DW	Dim Warm			
			TW	Tunable White			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia


3 x LOH1B

Black
Noir
Negro



MP-X158


Mounting Plate
with 158x57mm Hole



T-Bar Installation

X03158

Mounting Plate
with 158x57mm Hole

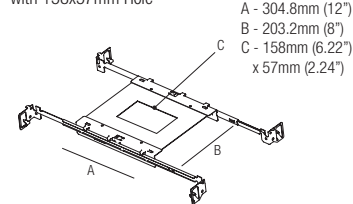


IC Housings

IC127X03158

Recessed Box for
Insulated Ceiling
with 158x57mm Hole

AT127X03158

Air Tight Recessed
Box for Insulated
Ceiling with
158x57mm Hole



Optionals - Accessoires - Accesorios

3 x DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

