


HAP 140

design: Lapo Grassellini




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 4 x 18V)

Power
Pouissance
Potencia
4 x 10W



Photometric diagrams

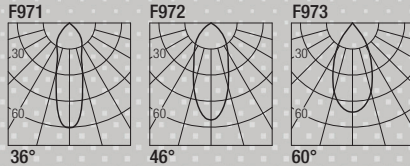

CCT	Flux _(x4)	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

HP14 | X | XX | 9 | X |


HP14	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm TW Tunable White CU Custom Personnalisée Personalizado		S 36° M 46° W 60°	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x4 Min. 1 Max. 1 CCPR040-A x2 Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x4 Min. 1 Max. 1 CCPR040-A x2 Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

4 x L0H1B


Black
Noir
Negro



Optionals - Accessoires - Accesorios


2 x DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



MP-X208


Mounting Plate
with 208x57mm Hole



T-Bar Installation

X03208

Mounting Plate
with 208x57mm Hole

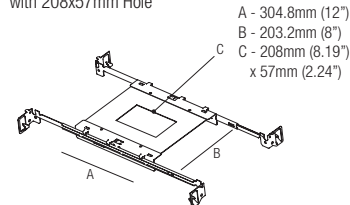

IC Housings

IC127X03208

Recessed Box for
Insulated Ceiling
with 208x57mm Hole

AT127X03208

Air Tight Recessed
Box for Insulated
Ceiling with
208x57mm Hole

