



HERO 20

design: Lapo Grassellini




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 36V)

Power
 Pouissance
 Potencia
20W

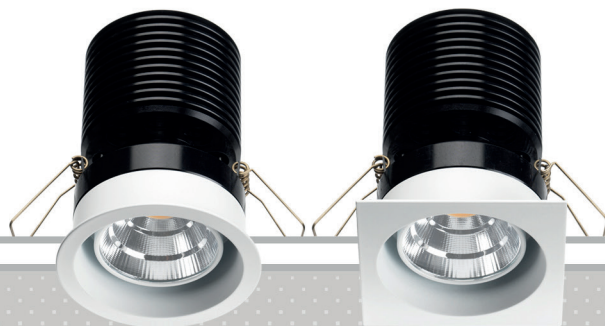

Photometric diagrams

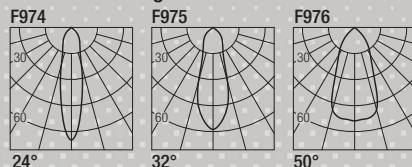

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

H2 | X | X | XX | 9 | X


H2	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		1 White Blanc Blanco		27 2700K			S 24°
		2 Square Carré Cuadrado		5 Black Noir Negro		30 3000K			M 32°
				C Custom Personnalisée Personalizado		35 3500K			W 50°
						40 4000K			
						CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White Phase / 0-10V (Dual Dimming)

500mA

CCPR040-A
 Min. 1
 Max. 1

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia

LOH2
 White
 Blanc
 Blanco

LOH2B
 Black
 Noir
 Negro


LOH2G
 Grey
 Gris



Optionals - Accessoires - Accesorios


DCVI.B.2

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 26W



MP-R065


Mounting Plate
 with 65mm Hole



T-Bar Installation

R02065

Mounting Plate
 with 65mm Hole

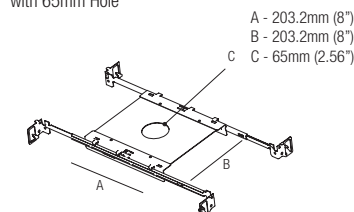

IC Housings

IC086R02065
 Recessed Box for
 Insulated Ceiling
 with 65mm Hole

AT086R02065
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 65mm Hole

