



HOLE

design: Roberto Mantovani


Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Pouissance
Potencia
7.5W

FLEXALIGHTING
NORTH AMERICA

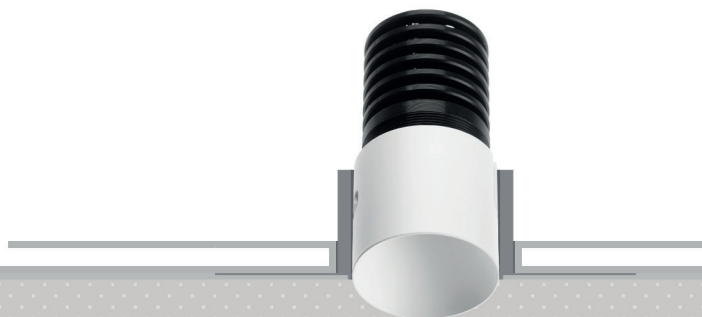

Photometric diagrams

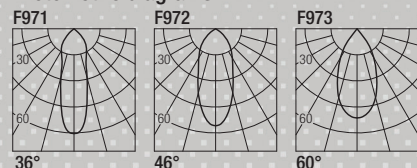

CCT	Flux	CRI
2400K	560 lm	95+
2700K	580 lm	98+
3000K	610 lm	98+
3500K	625 lm	98+
4000K	640 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

HH | X | XX | 9 | X |


HH	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco		24 2400K		S	36°
	5	Black Noir Negro		27 2700K		M	46°
	C	Custom Personnalisée Personalizado		30 3000K		W	60°
				35 3500K			
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White

0-10V/Phase

DLM.100
Min. 1
Max. 12
DLM.60
Min. 1
Max. 7
DLM.30
Min. 1
Max. 3

L001

Low luminance louver


Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R055


Mounting Plate
with 55mm Hole



T-Bar Installation

R01055

Mounting Plate
with 55mm Hole

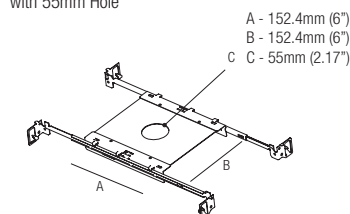


IC Housings

IC064R01055

Recessed Box for
Insulated Ceiling
with 55mm Hole

AT064R01055

Air Tight Recessed
Box for Insulated
Ceiling with
55mm Hole




Accessories - Accessoires - Accesorios

ZQH001

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
55mm
(2.17")

ZQH001.BMK

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
48mm
(1.88")