


JENA 2

design: Roberto Mantovani



Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W




FLEXALIGHTING

NORTH AMERICA



Photometric diagrams

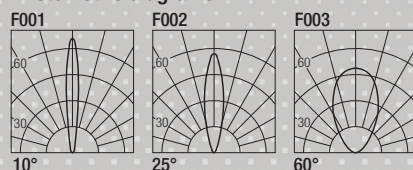

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

XJ11 | X | XX | X

XJ11	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados
	0	10°		27	2700K	N Black Noir Negro
	1	25°		30	3000K	K COR-TEN
	2	60°		35	3500K	Z INOX AISI 316L Steel Acier Acero
				40	4000K	C Custom Personnalisée Personalizado
				CU	Custom Personnalisée Personalizado	


Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White

500mA

Phase / 0-10V (Dual Dimming)

CCPR010-A
 Min. 1
 Max. 6


CCPR040-A
 Min. 1
 Max. 18

Optionals - Accessoires - Accesorios

CSXJ01

Recessing box

Boîtier d'encastrement
 Caja de empotrar



CSXJ01.CP

Concrete pour
 Coulée de béton
 Vertido de hormigón

