


JIMBO 10

design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Puissance
Potencia
10W



Adjustable optics
Optique réglable
Óptica ajustable
10-55°

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Tunable White 2700K-5000K	952 lm	95
2700K	921 lm	98+			
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

JBW₁X₁XX₁9₁


JBW	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	Adjustable optics Optique réglable Óptica ajustable
		1 White Blanc Blanco		24 2400K		10-55°
		5 Black Noir Negro		27 2700K		
		C Custom Personnalisée Personalizado		30 3000K		
				35 3500K		
				40 4000K		
				TW Tunable White		
				CU Custom Personnalisée Personalizado		

Drivers (Remote)



Alimentateurs
Alimentadores

Series wiring


Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

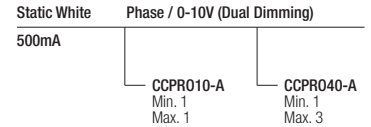


MP-R051
Mounting Plate
with 51mm Hole

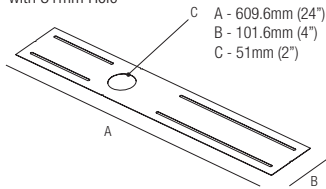

T-Bar Installation


R01051
Mounting Plate
with 51mm Hole

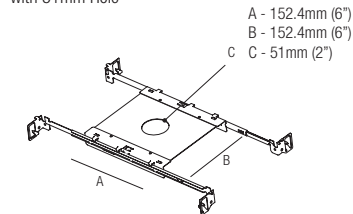

IC Housings

IC064R01051
Recessed Box for
Insulated Ceiling
with 51mm Hole

AT064R01051
Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole

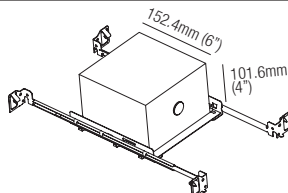

Optionals - Accessoires - Accesorios

DCVI.B.1
24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

