


JIMBO 2

design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2.9V)

Power
Pouissance
Potencia
1.5W



Adjustable optics

Optique réglable
Óptica ajustable

10-55°

Code Construction

Construction du code produit
Construcción del código de producto

JBW.X.XX


JBS	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		27 2700K
		2 Grey Gris		30 3000K
		5 Black Noir Negro		35 3500K
				40 4000K
				CU Custom

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.01%
Min 1./Max. 18 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
Dimming Range: 10%
Min. 2/Max. 7 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%
Min 7./Max. 14 Fixtures per Driver

Lutron Forward Phase

LTEA.1

Hi-Lume Forward Phase
20W 500mA Constant Current
Dimming Range: 1%
Min. 3/Max. 12 Fixtures per Driver

LTEA.2

Hi-Lume Forward Phase
30W 500mA Constant Current
Dimming Range: 1%
Min. 12/Max. 18 Fixtures per Driver


Lutron Ecosystem

PEQ.1

Hi-Lume ECO System
20W 500mA Constant Current
Dimming Range: 1%
Min. 3/Max. 12 Fixtures per Driver

PEQ.0

Hi-Lume ECO System Premier
20W 500mA Constant Current
Dimming Range: 0.1%
Min. 3/Max. 12 Fixtures per Driver

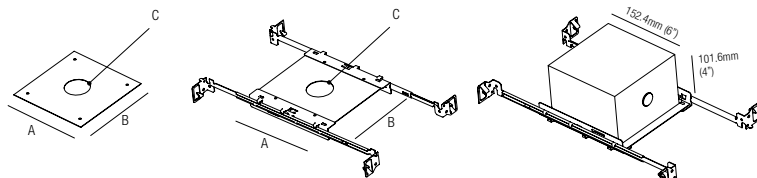

R01050-WOA

Mounting Plate
with 50mm Hole

A - 152.4mm (6")
B - 152.4mm (6")
C - 50mm (1.97")

R01050

Mounting Plate
with 50mm Hole

A - 152.4mm (6")
B - 152.4mm (6")
C - 50mm (1.97")

IC064R01050

Recessed Box for Insulated Ceiling
with 50mm Hole

AT064R01050

Air Tight Recessed Box for Insulated
Ceiling with 50mm Hole