


JIMBO 2

design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W



Adjustable optics
 Optique réglable
 Óptica ajustable
10-55°

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

JSB | X | XX


JBS	X	Finishing Acabados	XX	Color Temp. Température couleur Temperatura de color	Adjustable optics Optique réglable Óptica ajustable
		1 White Blanc Blanco		27 2700K	10-55°
		5 Black Noir Negro		30 3000K	
				35 3500K	
				40 4000K	
		C Custom Personnalisée Personalizado		CU Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring


Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory


Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPR010-A Min. 1 Max. 6	CCPR040-A Min. 1 Max. 20

MP-R051
 Mounting Plate
 with 51mm Hole



T-Bar Installation

R01051
 Mounting Plate
 with 51mm Hole

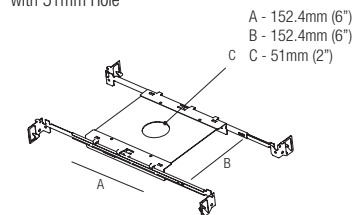

IC Housings

IC064R01051
 Recessed Box for
 Insulated Ceiling
 with 51mm Hole

AT064R01051
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 51mm Hole

