


JUNO 10

design: Lapo Grassellini


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)

Power
 Pouissance
 Potencia
10W




FLEXALIGHTING

NORTH AMERICA

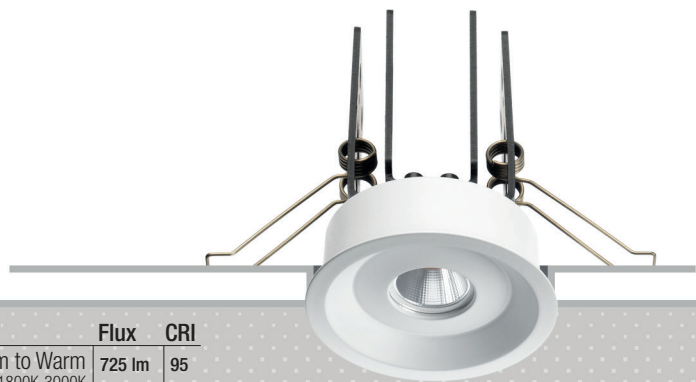

Photometric diagrams

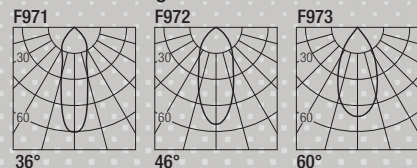

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

JU1 | X | XX | 9 | X


JU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado			S 36° M 46° W 60°

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie




For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPRO10-A Min. 1 Max. 1 CCPRO40-A Min. 1 Max. 3

MP-R060


Mounting Plate
 with 60mm Hole



T-Bar Installation

RO1060

Mounting Plate
 with 60mm Hole

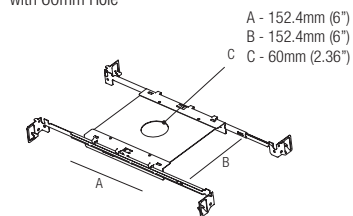


IC Housings

IC064R01060

Recessed Box for
 Insulated Ceiling
 with 60mm Hole

AT064R01060

Air Tight Recessed
 Box for Insulated
 Ceiling with
 60mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

