



IP RATED DOWNLIGHTS

JUPITER


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC


Power
Pouissance
Potencia
7.5W

FLEXALIGHTING

NORTH AMERICA

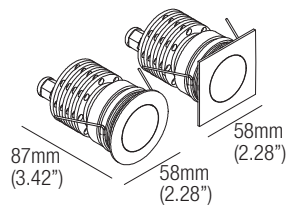

Photometric diagrams

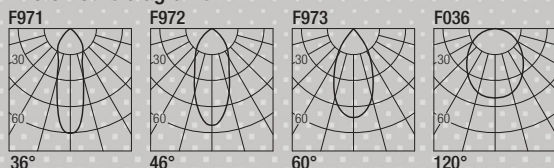

| CCT | Flux | CRI |
|-------|--------|-----|
| 2400K | 560 lm | 95+ |
| 2700K | 580 lm | 98+ |
| 3000K | 610 lm | 98+ |
| 3500K | 625 lm | 98+ |
| 4000K | 640 lm | 98+ |

Code Construction

Construction du code produit
Construcción del código de producto

JP1 | X | XX | 9 | X | X |


| JP1 | X | Shape | XX | Color Temp. | 9 | X | Finishing | X | Beam angle | | |
|----------|--------|-------|----------|---------------------|----------------------|---|-----------|---------------|-------------------|----------|------|
| Forma | Forme | Forma | Forme | Température couleur | Temperatura de color | | Finitions | Acabados | Angle de faisceau | | |
| | | | | | | | | | Ángulo del haz | | |
| 1 | Round | Rond | Redondo | 24 | 2400K | | B | White | Blanc | S | 36° |
| | | | | 27 | 2700K | | | Blanco | | M | 46° |
| 2 | Square | Carré | Cuadrado | 30 | 3000K | | N | Black | Noir | W | 60° |
| | | | | 35 | 3500K | | | Negro | Negro | X | 120° |
| | | | | 40 | 4000K | | K | COR-TEN | | | |
| | | | | CU | Custom | | Z | INOX | AISI 316L | | |
| | | | | | Personnalisée | | | Steel | Acier | | |
| | | | | | Personalizado | | C | Custom | Personnalisée | | |
| | | | | | | | | Personalizado | | | |

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options - including Lutron, Dali and DMX - please consult factory


Static White 0-10V/Phase

- DLM.100**
Min. 1
Max. 12
- DLM.60**
Min. 1
Max. 7
- DLM.30**
Min. 1
Max. 3

Optionals - Accessoires - Accesorios

CSDS10

Recessing box
Boîtier d'encastrement
Caja de empotrar

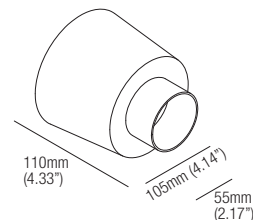

LOD1

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation


MP-R051

Mounting Plate
with 51mm Hole

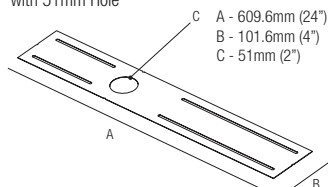

RO1051

Mounting Plate
with 51mm Hole

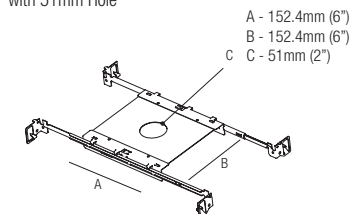

IC Housings

IC064R01051
Recessed Box for
Insulated Ceiling
with 51mm Hole

AT064R01051
Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole

