


KELLER S


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Puissance
Potencia
7W



Photometric diagrams

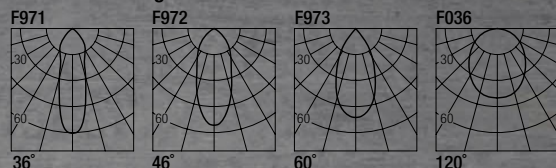

CCT	Flux	CRI
2700K	590 lm	98+
3000K	650 lm	98+
3500K	660 lm	98+
4000K	670 lm	85
Custom	TBD	



Code Construction

Construction du code produit
Construcción del código de producto

KE1 X XX 9 X

KE1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		2 Aluminum Aluminium Aluminio		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		6 Bronze Bronze		35 3500K			W 60°
				40 4000K			X 120°
				CU Custom			

NEED DRIVER DETAILS, DRAWINGS
AND PARALLEL DIAGRAM

Optionals

Accessori - Accessoires
Zubehör - Accesorios

L0D1

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria