



LEDA Q10

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W

FLEXALIGHTING
NORTH AMERICA

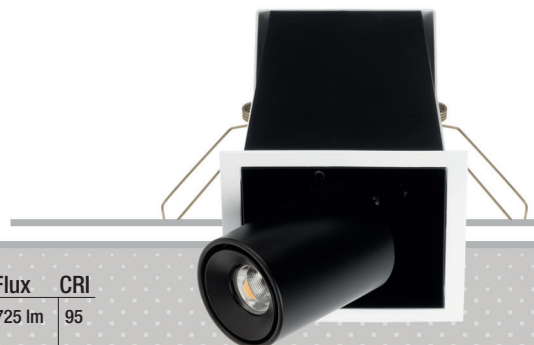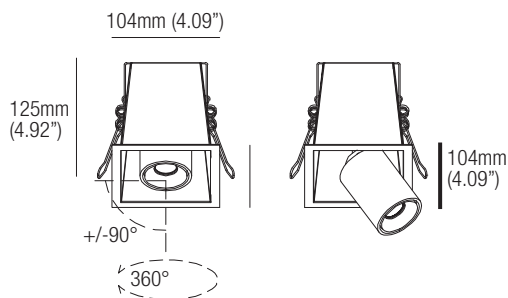

Photometric diagrams

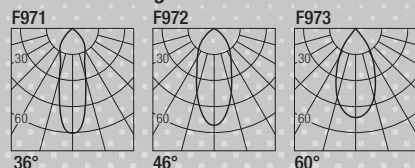

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LDQ | X | XX | 9 | X


LDQ	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K		S	36°
		5 Black Noir Negro		27 2700K		M	46°
		C Custom Personnalisée Personalizado		30 3000K		W	60°
				35 3500K			
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria


T-Bar Installation

Q01095

Mounting Plate
with 95mm Hole

MP-Q095

Mounting Plate
with 95mm Hole

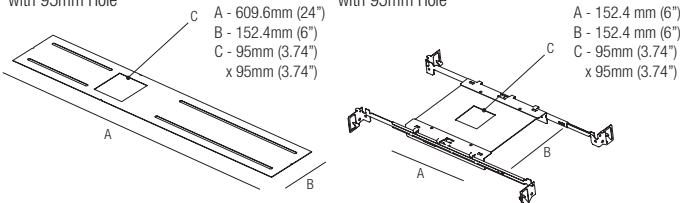


IC Housings

IC064Q01095

Recessed Box for
Insulated Ceiling
with 95mm Hole

AT064Q01095

Air Tight Recessed
Box for Insulated
Ceiling with
95mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

